

MAST AMPLIFIER + POWER SUPPLY KIT

KIT AM 361

+ **AM 361** easy mAgnek
+ **FA QC 242** QuiCoax.

AM 361 easy mAgnek

- ✓ Great ease of installation thanks to the built-in magnetic fixing system
- ✓ One-handed mounting
- ✓ Compatible with any support or pole on the market
- ✓ Easy, comfortable and safer to work at height
- ✓ Patented and exclusive Ek magnetic clamping system
- ✓ Excellent gain / output level ratio
- ✓ Low noise
- ✓ Wide power voltage margin
- ✓ ABS plastic case, IP 23, with self-supporting lid and closure for coaxial cables
- ✓ Swivel amplifier for easy connection.

FA QC 242

- ✓ Switched power supplies
- ✓ Ultra-compact size
- ✓ Suitable for 80x80mm junction box
- ✓ Easy to install, just a few seconds
- ✓ QuiCoax connection system
- ✓ Zamak quicoax case high protection
- ✓ Working led indicator
- ✓ New generation quicoax system, even easier connection


Ek EKSELANS BY ITS



KIT AM 361



Unique packaging

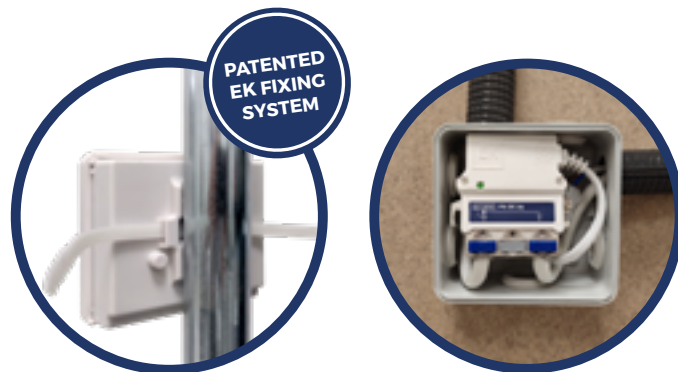

**80x 80 mm junction
box installation**



TECHNICAL INFORMATION

REFERENCIE		KIT AM 361
Code		051032

REFERENCE		AM 361 EASY MAGNEK
Inputs		1 x UHF
Frequency range	MHz	470-694
Gain	dB	36
Regulation	dB	18
Output level (DIN 45004B)	dB μ V	114
Noise figure	dB	<2
Supply voltage	Vdc	24
Passage of current.		ON/OFF
Power consumption	mA	\leq 70

REFERENCE		FA QC 242
Outputs	N°	2
Frequency range	MHz	47-1000
Insertion loss	dB	<4
Output voltage	Vdc	24
Maximum current output	mA	150
Power supply	Vac	100/240
Dimensions	mm	62 x 60 x 22