


REFERENCIA	RÉFÉRENCE	ARTICOLO	REFERÊNCIA	REFERENCE		RI 2	RF 12	RF 13	RF 14	RF 16	RF 18
Código	Code	Codice	Codigo	Code		141006	141001	141002	141003	141004	141005
Banda de paso	Bande passante	Banda passante	Banda de passagem	Passband	MHz	5-2400	5-2400	5-2400	5-2400	5-2400	5-2400
Salidas	Sorties	Uscite	Saídas	Outputs	Nº	2	2	3	4	6	8
Pérdidas de paso	Affaiblissement de passage	Perdite di passaggio	Perdas inserção	Insertion loss	dB 860 MHz dB 2300 MHz	4 5,5	4 5,5	7 9,5	8,1 10	11 14,5	12 15,5
Desacoplo entre salidas	Protection entre sorties	Isolamento tra uscite	Isolamento entre as saídas	Isolation between outputs	dB	>20	>20	>20	>20	>20	>20
Perdidas de retorno	Affaiblissement de réflexion	Perdite di ritorno	Perdas de retorno	Return loss	dB	>10	>10	>10	>10	>10	>10
Paso de corriente	Passage de courant	Passaggio DC	Passagem de corrente	DC Pass	mA	800	0,8	0,8	0,8	0,8	0,8

Montaje conector F Assemblage de connecteur F Montaggio connettore F Montagem de conector F F connector assembly



RI 2

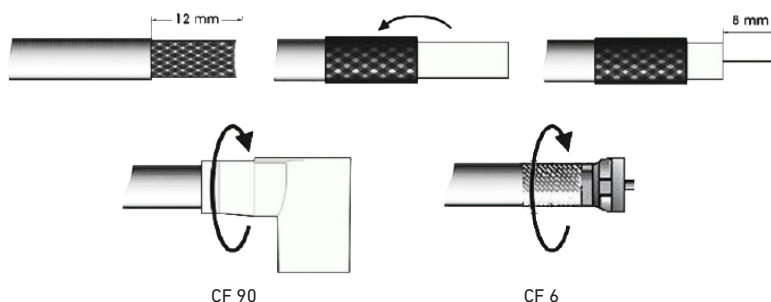

RF 12



RF 13 / RF 14



RF 16 / RF 18