

ADALTRA

— we make the connection —



GPON by Ek





MANAGED SWITCH

SWG 24 L2

- / 24 Port 10/100/1000Mbps + 4 SFP port
- / Layer 2+ function for an efficient routing
- / Standard IEEE802.3, 802.3u, 802.3ab, 802.3x.
- / VLAN management, IGMP snooping, MACs admin, port mirroring.....
- / Web management interface, SSH, TELNET, SNMP
- / 1U / Rack 19"
- / Multi-cast facilities (compnies, hotels, hospitals, SoHo,..)
- / Suitable product to include in GPON by EK, EK CAST, EK HOTEL or WiFi by EK installations

REFERENCE	SWG 24 L2
Code	334200
Ports	24 x 10/100/1000 Mbps
Port functions	IEEE 802.3 para Ethernet IEEE 802.3u para Fast Ethernet IEEE 802.3u por IEEE 802.3ab GB Ethernet MDI/MDIX automático El control de flujo IEEE 802.3x admite el modo dúplex completo Admite operación de dúplex medio/ completo (la mitad a 10/100 Mbps, completo a 1000 Mbps)
Switching Capacity	56 Gbps
Max Forwarding Rate	41,66 Mpps
MAC Address Table size	8K
Packet buffer	4 MB
Flash Memory	16 MB
Standby Mode	6,143 W
Maximum Power Consumption	16,34 W
Power input	Fuente de alimentación interna de 100 a 240 V CA, 50 a 60 Hz
MTBF	415,670 h
VLAN	Port-based VLAN 802.1Q tagged VLAN Auto Surveillance VLAN Voice VLAN Management VLAN Max. 4094 VLAN
L2 Features	- Control de flujo IGMP Snooping V1/V2/V3 / Admite 256 grupos MLD snooping Link aggregation - Loopback detection - LLDP Spanning tree 802.1D STP / 802.1w RSTP / 802.1s MSTP QOS Port mirroring
Security	DDOS ACL
Management	WEB, SSH, TELNET, SNMP.
Heat dissipation	55.77 BTU/h
Ventilation	Sin ventilador
Operating temperature	0 - 50 °C
Humidity	10 - 90 % (sin condensación)
Max dissipation	7,03 BTU/h
Dimensions	440 x 280 x 44 mm
Weight	2,295 Kg

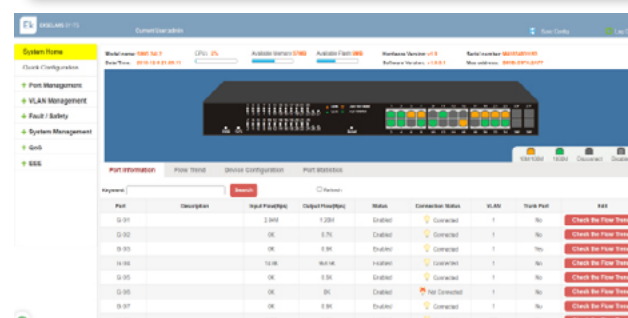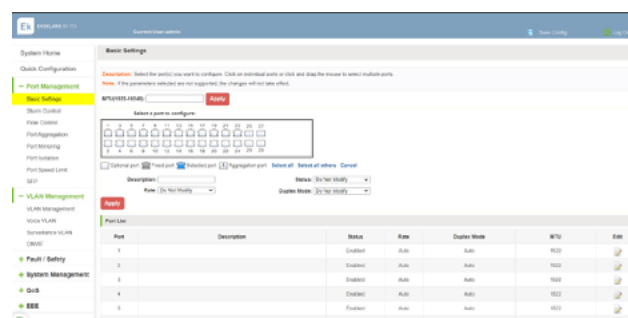

ELECTRÓNICA DE RED

RGM

/ Multi-port router (10 x 1Gb) for GPON, EK HOTEL TV, EK CAST and WiFi installations

REFERENCE	RGM
Code	280070
SPECIFICATIONS	
Product code	RB3011UiAS-RM
Architecture	ARM 32bit
CPU	IPQ-8064
CPU core count	2
CPU nominal frequency	1.4 GHz
Dimensions	443 x 92 x 44 mm
RouterOS license	5
Operating System	RouterOS
Size of RAM	1 GB
Storage size	128 MB
Storage type	NAND
MTBF	Approximately 200'000 hours at 25C
Tested ambient temperature	-20°C to 70°C
IPsec hardware acceleration	Yes
POWERING	
Number of DC inputs	2 (DC jack, PoE-IN)
DC jack input Voltage	10-30 V
Max power consumption	30 W
Max power consumption without attachments	10 W
Cooling type	Passive
PoE in	Passive PoE
PoE in input Voltage	10-30 V
POE-OUT	
PoE-out ports	Ether10
PoE out	Passive PoE
Max out per port output (input 18-30 V)	600 mA
Max total out (A)	600 mA
ETHERNET	
10/100/1000 Ethernet ports	10
FIBER	
SFP ports	1
PERIPHERALS	
Serial console port	RJ45
Number of USB ports	1
USB Power Reset	Yes
USB slot type	USB 3.0 type A
Max USB current (A)	1
OTHER	
PCB temperature monitor	Yes
Voltage Monitor	Yes



Back detail

GPON OLTs


OLT 8E

- / Header for GPON networks. Line terminal
- / Intuitive setup using SWH-TR server
- / 8 downlink GPON ports
- / 2 uplink 10GE / GE ports + 6 uplink GE ports
- / Redundant power supply
- / Compatible with ITU-T G.984.x and ITU-T G.988 standard, meets all requirements for band networking
- / Ultra wide FTTH
- / Maximum downstream speed 2.5 Gbps and upstream 1.25 Gbps
- / ONT remote management with OMCI protocol
- / 1U rack

REFERENCE	OLT 8E
Code	310008
INTERFACES	
Switching capacity	60 Gbps
PON Interfaces	8 SFP GPON ports
Uplink interfaces	2 SFP 10GE / 1GE ports 8 SFP GE ports
Other interfaces	1 USB 1 FE management port
GPON FEATURES	
PON standards and characteristics	ITU-T G.984.x Up to 128 ONTs for each PON port and up to 1000 T-CONT Management of up to 5 types of width profiles T-CONT band Adaptive bandwidth DBA algorithm Supports various authentication systems ONTs: SN, password, SN + password, Loid, Password
ETHERNET FEATURES	
VLAN	Up to 4000 VLAN inputs VLAN stacking (Q-in-Q) VLAN management by ONT service
STP protocol	IEEE 802.1D STP IEEE 802.1w RSTP IEEE 802.1s MSTP
Ports	Control de ancho de banda bidireccional Agregación virtual de enlaces estática y dinámica LACP Port mirroring y traffic mirroring
Multicast	Multicast estático IGMP v1/v2/v3 IGMP Snooping / Proxy
QoS	It allows to limit the speed on the port or on the defined service. Allows priority observation based on port or defined service and provides 802.1P and DSCP priority. QoS management over the port or over the defined service, supports 8 queues, algorithms SP, WRR or SP + WRR
User security	Protection against ARP-flooding Protection against ARP-spoofing Supports port isolation and ONU isolation control Allows IP, MAC, VLAN and port binding
Device security	Supports port isolation and ONU isolation control Allows IP, MAC, VLAN and port binding
Network security	Broadcast / multicast suppression per port ACL Flow Filtering Mechanism
MANAGEMENT	
Network management	CLI command line SWH-TR
GENERAL CHARACTERISTICS	
Operating temperature	-5 - 55°C
Feeding	AC: 100 – 240 VAC 47 – 63 Hz DC: Input -40V / -75V (Optional) Redundant power supply included
Consumption	56W (typ) / 80W (máx)
Dimensions	440 x 320 x 44,2 mm
Weight	3,5 kg (aprox.)



APPLICATION EXAMPLE

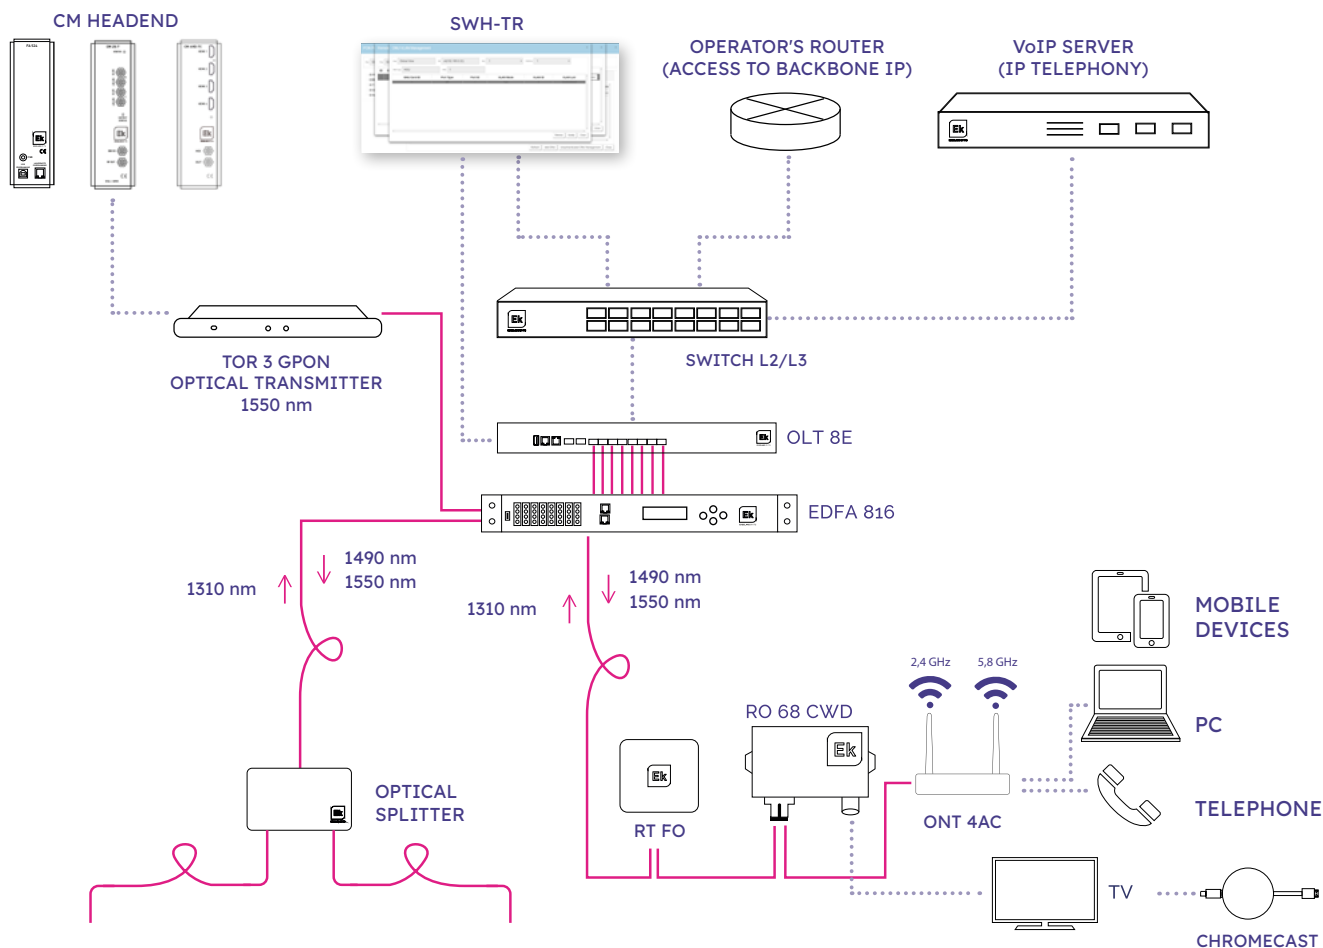

GPON OLTs


OLT 16E

- / Header for GPON networks. Line terminal
- / Intuitive setup using SWH-TR server
- / 16 downlink GPON ports
- / 2 uplink 10GE / GE ports + 6 uplink GE ports
- / Redundant power supply
- / Compatible with ITU-T G.984.x and ITU-T G.988 standard, meets all requirements for band networking ultra wide FTTH
- / Maximum downstream speed 2.5 Gbps and upstream 1.25 Gbps
- / Remote management using SNMP protocol and remote management of ONTs using OMCI protocol
- / 1U rack

REFERENCE	OLT 16E
Code	310009
INTERFACES	
Switching capacity	60 Gbps
PON Interfaces	16 ports SFP GPON
Uplink Interfaces	2 ports SFP 10GE / 1GE 6 ports SFP 1 GE
Other interfaces	1 USB 1 FE management port
GPON SPECIFICATIONS	
PON standard and characteristics	ITU-T G.984.x Up to 128 ONTs per each PON port and up to 1000 T-CONT Up to five profiles of T-CONT bandwidth management DBA algorithm for adaptive bandwidth Different authentication types of ONT's: SN, password, SN+password, Loid, Loid Password
ETHERNET SPECIFICATIONS	
VLAN	Up to 4000 VLAN inputs VLAN stacking (Q-in-Q) ONT management of VLAN services
STP Protocols	IEEE 802.1D STP IEEE 802.1w RSTP IEEE 802.1s MSTP
Ports	Two-way bandwidth control Static and dynamic virtual links LACP aggregation Port & traffic mirroring
Multicast	Static multicast IGMP v1/v2/v3 IGMP Snooping / Proxy
QoS	Allows speed limitation on the port or defined service Allows port-based or service-based priority observation and offers 802.1P and DSCP priority Port and defined service QoS support. Supports eight queues, SP algorithms, WRR or SP + WRR
Device security	ARP-flooding protection ARP-spoofing protection Supports port isolation and ONT isolation control Allows IP, MAC, VLAN and port linkage
Network security	Port broadcast multicast suppression ACL flow filtering mechanism
MANAGEMENT	
Network management	CLI command line SWH - TR
GENERAL SPECIFICATIONS	
Working temperature	-5 - 55°C
Mains feeding	AC: 100 - 240 VAC / 47 - 63 Hz DC: Input -40V / -75V (Optional) Included redundant power supply
Consumption	56W (typ) / 80W (max)
Dimensions	440 x 320 x 44,2 mm
Weight	3,5 kg (aprox.)



APPLICATION EXAMPLE

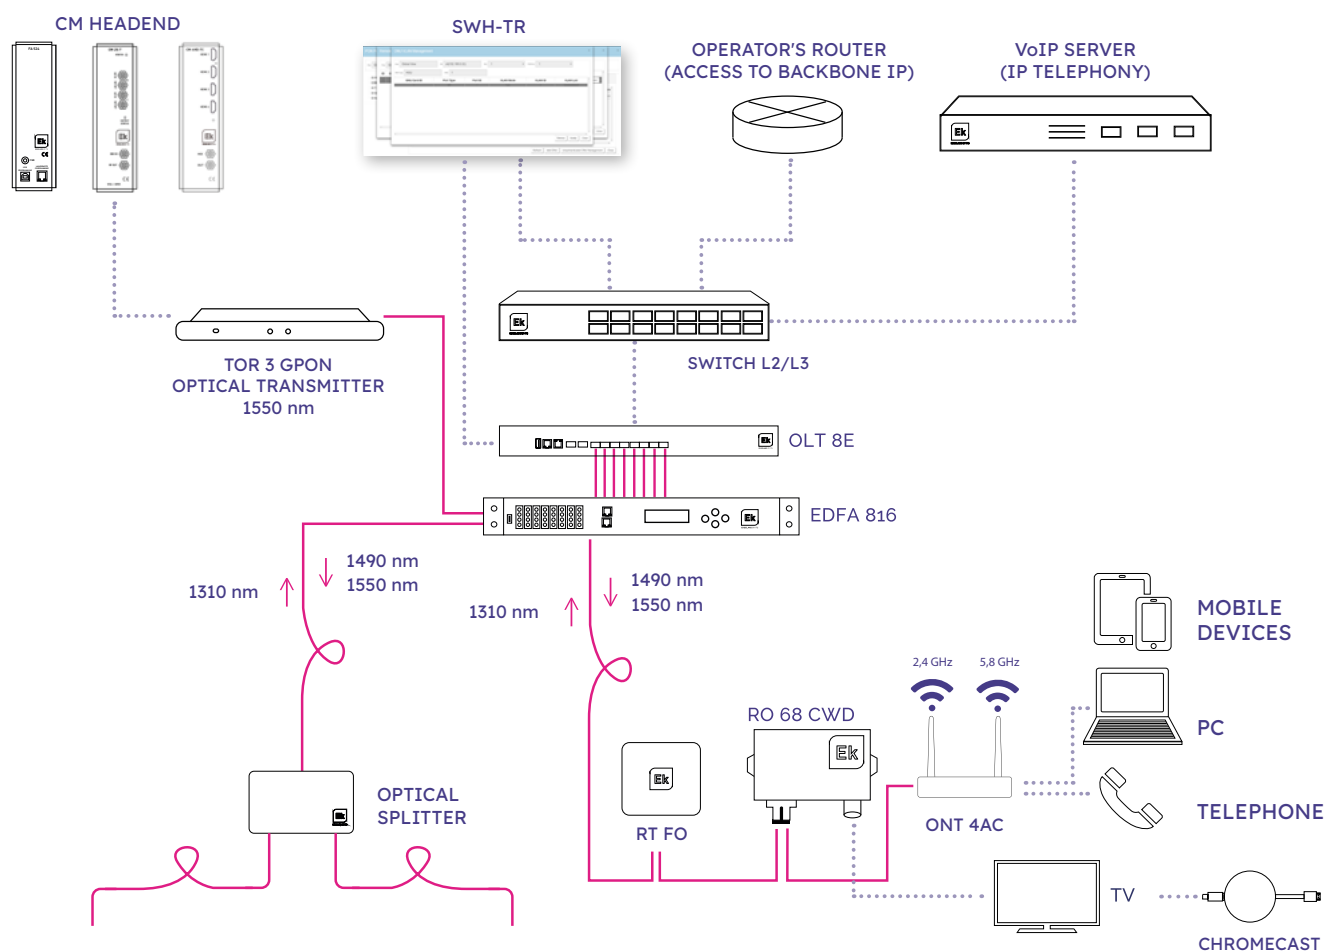

CONFIGURATION SERVER

SWH-TR

OLT Configuration

- / Profile and VLAN configuration
- / Uplink Port Configuration
- / Multicast Configuration
- / OLT restart
- / OLT Factory Reset


ONTs configuration

- / Configuration of private ONT parameters: Wifi, VoIP, port assignment to VLAN
- / Automatically apply template to ONTs in bulk
- / Manual configuration of ONTs by groups or individually
- / Management IP allocation to each ONT automatically
- / Group ONTs firmware update
- / Resetting ONTs individually or in groups
- / Factory reset of ONTs individually or in groups

General characteristics

- / Dedicated server
- / Management web interface
- / Import and export of complete system configuration
- / Guaranteed compatibility with Chrome browser

- / Configuration system for GPON networks in hospitality environments
- / Complete and intuitive view of the system from the main page
- / OLT and ONTs unified configuration, including WIFI and VoIP

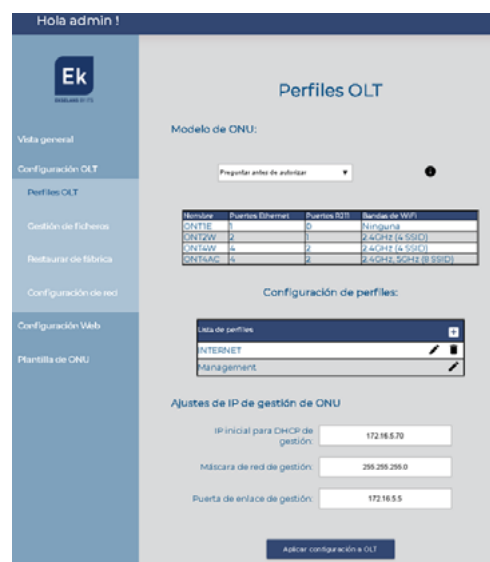

OPTICAL TRANSMITTER FOR RE OVERLAY HEADBOARDS

TOR 3 GPON · TOR 3 GPON FI

- / 1 GHz and 2.6 GHz optical transmitters compatible with GPON installations
- / Allows radio frequency signal distribution within the GPON network
- / One 19" rack unit

REFERENCE	TOR 3 GPON	TOR 3 GPON FI
Code	271021	271020
RF INPUT		
Frequency	47 - 1000 MHz	47 - 2600 MHz
Flatness	≥1 dB	≥1 dB
Input level (CAG)	77 - 87* dBμV	77 - 87* dBμV
Return loss	≥16 dB	≥16 dB
Input connector	F	F
Output test	-20 dB	-20 dB
OPTICAL OUTPUT		
Wavelength	1550 nm	1550 nm
Optical power	3 dBm	3 dBm
Light source	DFB	DFB
Optical return loss	>50 dB	>50 dB
Optical connector	SC/APC	SC/APC
GENERAL		
Feeding	90-265 Vac / 50-60 Hz	90-265 Vac / 50-60 Hz
Consumption	<14 W	<14 W
Working temperature	-20...55 °C	-20...55 °C



TOR 3 GPON



TOR 3 GPON FI

REFERENCE		EDFA 816	EDFA 812	EDFA 1617	EDFA 3219
Code		310010	310023	310011	310022
CONNECTIONS					
Number of optical ports for OLT	N.	8	8	16	32
Number of output optical ports	N.	8	8	16	32
INPUT					
Working wavelength (CATV)	nm	1540 - 1563			
Pass wavelength (OLT)	nm	1310 / 1490			
Input optical power (CATV)	dBm	±10			
OUTPUT					
Total output optical power	dBm / mW	27/500	24/250	31/1260	37/5000
Output optical power adjustment	dB	0...6			
Optical output power per port	dBm	16	12	16,5	19,2
Difference of each otput port optical power	dB	±0,5			
Attenuation working wavelength (CATV)	dB	<0,8			
OLT wavelength attenuation	dB	<0,8			
Optical power monitor	dB	-20			
Polarization dependence Loss / Gain	dB	0,3 / 0,4			
Noise Figure	dB	<5,5			
IN - OUT					
CATV - OLT Isolation	dB	>40			
IN - OUT Isolation	dB	30			
Optical connectors		SC/APC			
MAINS FEEDING					
Voltage	Vac / Hz	90-265 / 50-60			
Consumption	W	<50			
Number of PSUs	N.	2			
GENERAL					
Management interface		SNMP - RJ45			
Serial Interface		RS-232			
Ports		Ethernet - LAN RJ45			
Display / Buttons		LCD /4			
STATUS LEDs		Pump, Input, Alarm, Power 1, Power 2			
Working temperature	°C	-5...65			
Dimensions	mm	1xU Rack 19"		2xU Rack 19"	

EDFAs GPON FOR RE-OVERLAY

EDFA 812 / 816 / 1617 / 3219

- / Compatible with FTTx PON (EPON / GPON / GPON)
- / Models of 8, 16 and 32 optical output ports with powers from 8 to 19 dBm per port
- / Low noise pre amp Very low degradation of CNR and MER
- / Avoid the need to cascade different EDFAs
- / Very low noise figure
- / Redundant power supply
- / Control and monitoring via SNMP




EDFA 812 / 816



EDFA 1617 / 3219

APPLICATION EXAMPLE

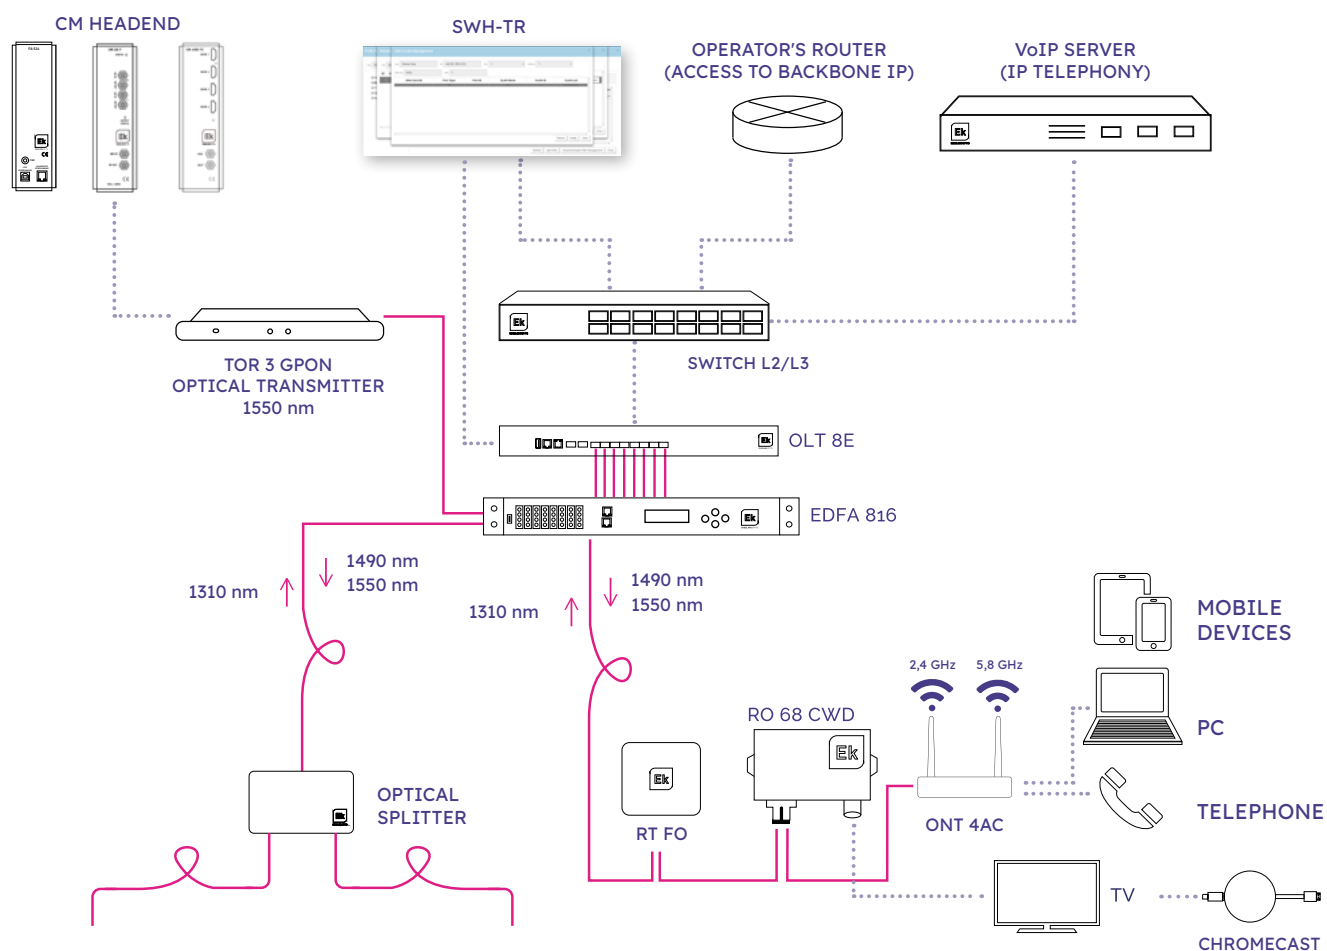

GPON/FTTH OPTICAL NETWORK TERMINAL


ONT 2W

- / GPON Optical Network Unit for SOHO and residential purposes
- / 2 x Autoadaptative 10/100/1000Base-T Ethernet ports
- / WiFi 2x2 802.11n (Up to 300Mbps of wireless throughput)
- / 1x POTS telephony port
- / Allows access to ultra high speed networks: Internet, VoIP and IPTV
- / Compatible with ITU-T G.984.x standard. Meets all requirements for creating ultra high speed FTTH networks
- / 2,5Gbps maximum downlink / 1,25 Gbps uplink speed
- / Local and remote management. OMCI, Web, CLI and SNMP
- / Compatible and interoperable with the Ekselans OLTs and other main brands in the market

REFERENCE	ONT 2W
Code	310032
GPON SPECIFICATIONS	
Transfer speed	Downstream: 2.488Gbps Upstream: 1.244Gbps
Connector	SC/APC
Optical	ITU-T G.984.2 Clase B+
Standards	ITU-T G.984.x (G.984.5 support) FCC 47 CFR Part 15, Class B FDA 21 CFR 1040.10 & 1040.11, Class I IEEE 802.3 Ethernet 802.1 q/p VLANs
Optical wavelength and power	Downlink Wavelength: 1490nm Sensitivity: -28dBm Saturation: -8dBm Uplink Wavelength: 1310nm Transmission power: 0.5 - 5dBm
Fiber mode	G.652 Monomode
Others	32 T-CONTs 256 GEM Flexible mapping between GEM ports and T-CONTs Upstream and downstream FEC (Forward Error Correction) Automatic discovery of SN and password activation AES-128 encryption with keys generation and commutation 802.1p service upstream
ETHERNET SPECIFICATIONS	
Standards	IEEE802.3 / IEEE802.3au / IEEE802.3x
Interfaces	2 ports 10/100/1000BASE-T port. RJ45 Connector Auto negotiation Auto MDI/MDIX
Router functionality (switching & routing)	Bridging & Switching (802.1d / 802.1q) 8 clases de tráfico (802.1p) Control de flujos 802.3n Etiquetado y filtrado de VLAN VLAN stacking (Q-in-Q) IGMP multicast para video IPTV IGMP snooping RSTP IPHOST SSH QOSSP, WRR, SP+WRR Port Mirror
WIFI SPECIFICATIONS	
Standard	IEEE 802.11 b/g/n (Up to 300 Mbps throughput)
Frequency	2,4 GHz / 300Mbps
Antenna	2x2, 5dBi
EIRP	Max 25dBm
Others	Up to 4 possible SSID's Up to 64 simultaneous connections WEP, WPA-PSK, WPA2-PSK (AES, TKIP) Security MAC filtering
POTS TELEPHONY SPECIFICATIONS	
REN	Max 5REN
Connector	1 port RJ11
Call Voltage	65V RMS
Protocols	SIP / MGCP G.711 (A- & u-), G.729, G.726 codec DTMF Calling Echo suppression support, VAD, CNF Call identification, hold call, forward call, 3-users call T.30 & T.38 FAX
USB	
Function mode	Host / device
Current	Max 1A
GENERAL SPECIFICATIONS	
Working temperature	-5~45°C
Voltage	12V DC1.5A max
Dimensions	244 x 161 x 41 mm
Weight	500g (aprox.)



APPLICATION EXAMPLE

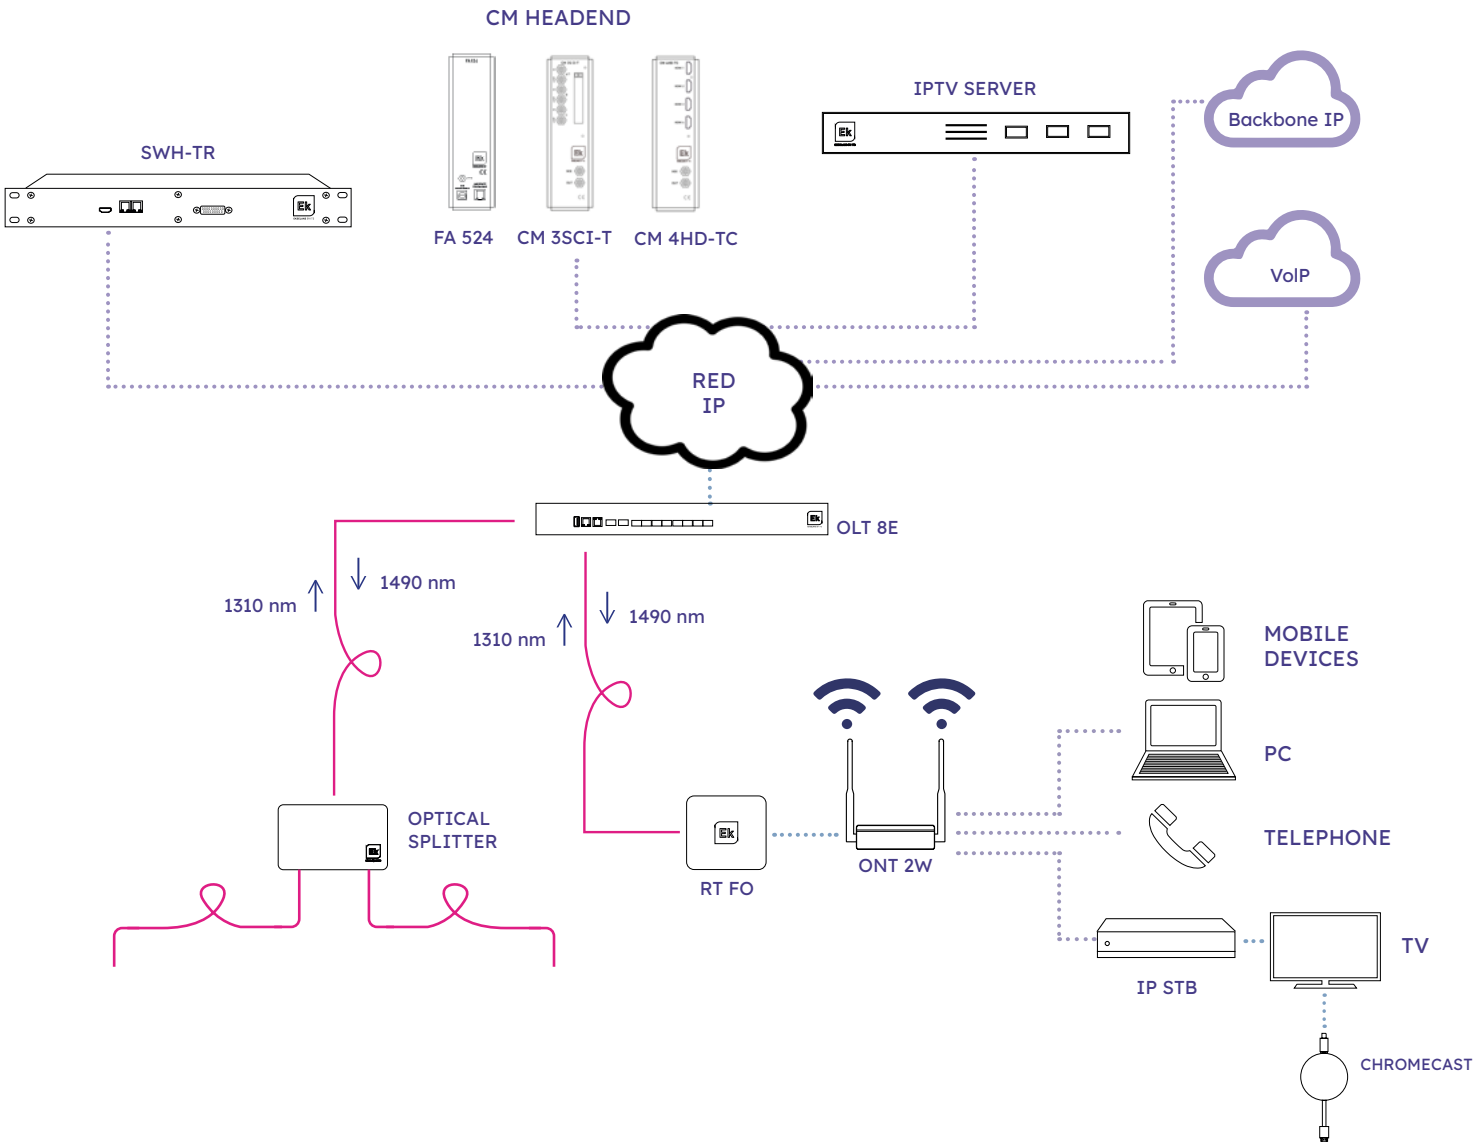

GPON/FTTH OPTICAL NETWORK TERMINAL


ONT 4AC

- / GPON Optical Network Unit for SOHO and residential purposes
- / 4x Autoadaptive 10/100/1000Base-T Ethernet ports
- / WiFi 3x3 802.11b/g/n 2,4GHz and 3x3 802.11n/ac 5,8 GHz
- / 2x POTS telephony ports
- / 1 USB port
- / Allows access to ultra high speed networks: Internet, VoIP and IPTV
- / Compatible with ITU-T G.984.x standard. Meets all requirements for creating ultra high speed FTTH networks
- / 2,5Gbps maximum downlink / 1,25 Gbps uplink speed
- / Local and remote management. OMCI, Web, CLI and SNMP
- / Compatible and interoperable with the Ekselans OLTs and other main brands in the market



REFERENCE	ONT 4 AC
Code	310017
GPON SPECIFICATIONS	
Transfer speed	Downstream: 2.488Gbps Upstream: 1.244Gbps
Connector	SC/APC
Optical	ITU-T G.984.2 Clase B+
Standards	ITU-T G.984.x (G.984.5 support) FCC 47 CFR Part 15, B Class FDA 21 CFR 1040.10 & 1040.11, Class I IEEE 802.3 Ethernet 802.1 q/p VLANs
Optical wavelength and power	Downlink Wavelength: 1490nm Sensitivity: -28dBm Saturation: -8dBm Uplink Wavelength: 1310nm Transmission power: 0.5 - 5dBm
Fiber mode	G.652 Monomode
Others	32 T-CONTs 256 GEM Flexible mapping between GEM ports and T-CONTs Upstream and downstream FEC (Forward Error Correction) Automatic discovery of SN and password activation AES-128 encryption with keys generation and commutation 802.1p service upstream
ETHERNET SPECIFICATIONS	
Standards	IEEE802.3 IEEE802.3au IEEE802.3x
Interfaces	4 ports 10/100/1000BASE-T port. RJ45 Connector Auto negotiation Auto MDI/MDIX
Router functionality (switching & routing)	Bridging & Switching (802.1d / 802.1q) 8 traffic classes (802.1p) Flow control 802.3n VLAN labelling and filtering VLAN stacking (Q-in-Q) IGMP multicast for IPTV video IGMP snooping RSTP IPHOST SSH QOS (SP, WRR, SP+WRR) Port Mirror
WIFI SPECIFICATIONS	
Standard	IEEE 802.11 b/g/n (hasta 300 Mbps de transferencia)
Antenna	2x2, 5dBi
EIRP	Max 25dBm
Others	Up to 4 possible SSID's Up to 64 simultaneous connections WEP, WPA-PSK, WPA2-PSK (AES, TKIP) Security MAC filtering
POTS TELEPHONY SPECIFICATIONS	
REN	Max 5REN
Connector	2 ports RJ11
Call Voltage	65V RMS
Protocols	SIP / MGCP G.711 (A- & u-), G.729, G.726 codec DTMF Calling Echo suppression support, VAD, CNV Call identification, hold call, forward call, 3-users call T.30 & T.38 FAX
USB	
Function mode	Host / device
Current	Max 1A
GENERAL FEATURES	
Working temperature	-5~45°C
Voltage	12V DC1.5A max
Dimensions	244 x 161 x 41 mm
Weight	500g (aprox.)

APPLICATION EXAMPLE

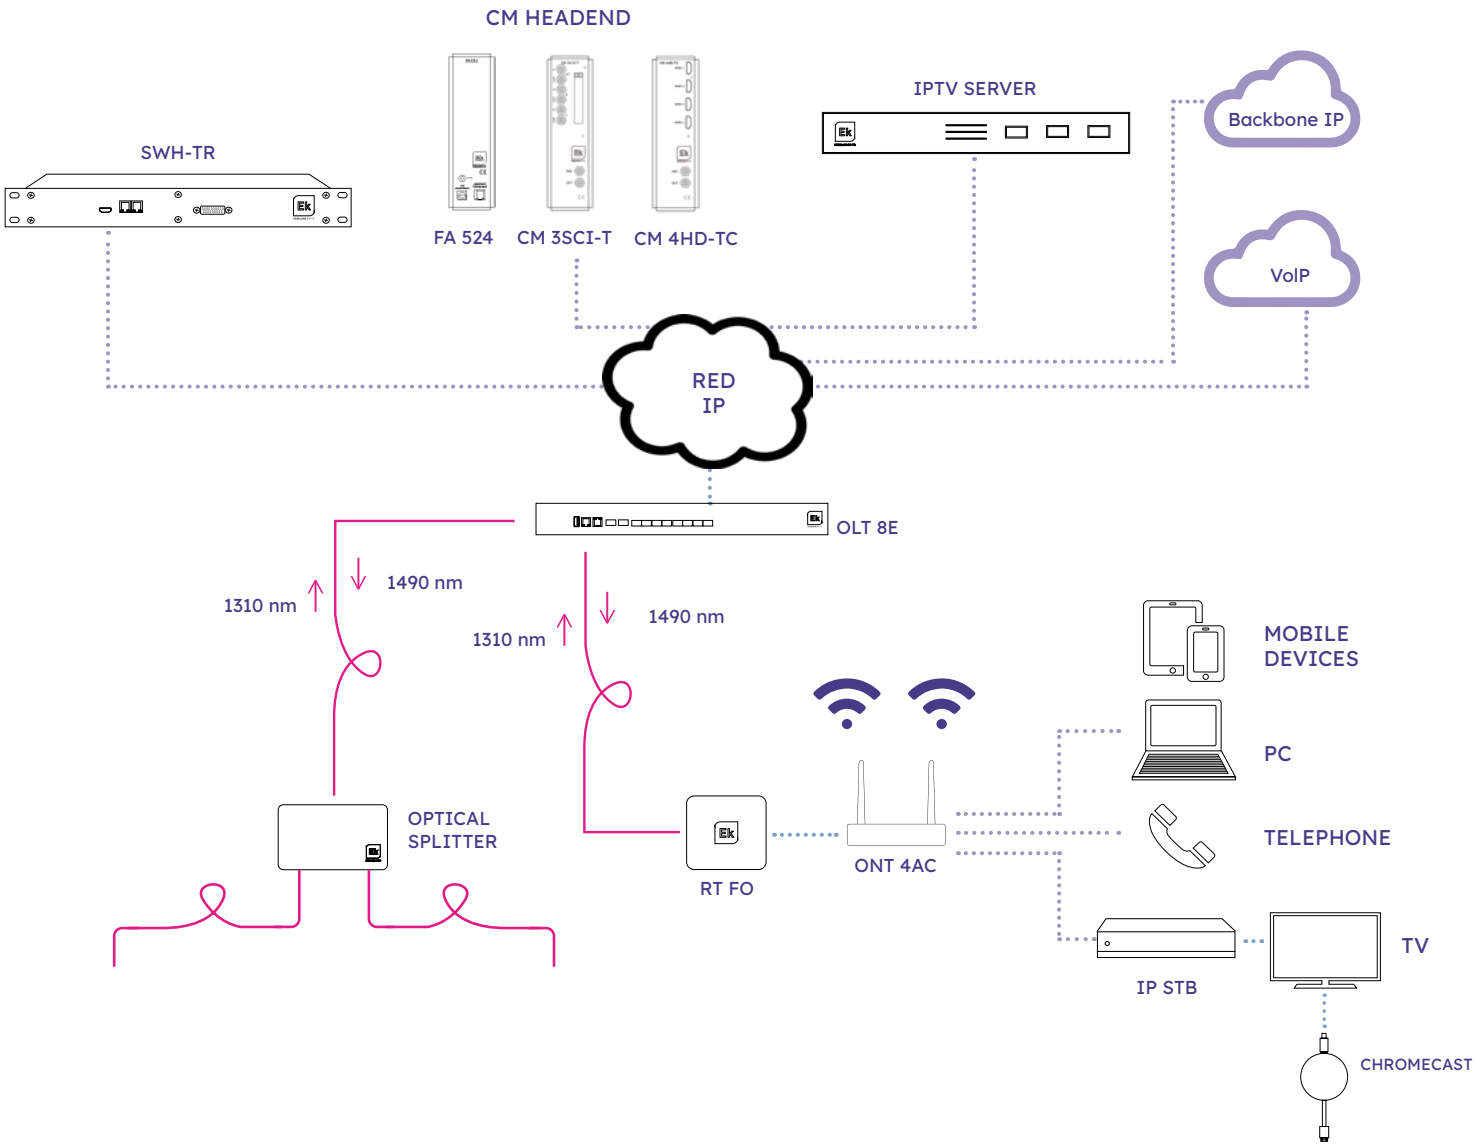

PoE GPON OPTICAL NETWORK TERMINAL

ONT 4 W6

- / GPON Optical network terminal and gateway optimized for FTTR and POL networks
- / 4 Autoadaptative 10/100/1000BASE-T Ethernet ports
- / WIFI 802.11b/g/n/ac/ax 2.4GHz/5GHz 3000Mbps
- / 1 POTS port for telephony
- / 1 USB port
- / Compatible with ITU-T G.984.x standard, meets all requirements for access to ultra-broadband FTTH networks
- / Maximum downstream speed 2.5 Gbps and upstream speed 1.25 Gbps
- / Allows access to ultra-broadband services: internet, VoIP, and IPTV
- / Efficient management via SWH-TR server
- / 16 VLANs for 16 services per ONT



REFERENCE		ONT 4 W6
Code		310049
GPON SPECIFICATIONS		
Transfer speed		Downstream: 2.488Gbps / Upstream: 1.244Gbps
Connector		SC/APC
Protocols		ITU-T G.984/G.988 IEEE 802.3ah, YD/T 1475-2006 IEEE 802.1D, Spanning Tree IEEE 802.1Q, VLAN IEEE 802.1w, RSTP IGMP v1/v2/v3 ITU-T Y.1291 VoIP: SIP
Optical wavelength and power		Downlink Longitud de onda: 1490nm Sensibilidad: -28dBm Saturación: -8dBm Uplink Longitud de onda: 1310nm Potencia de transmisión: 1 ~ 4 dBm
Fiber mode		G.652 Monomodo
Security	Encryption	AES-128/AES-192/AES-256/DES/3DES
	Data Protection	FEC(Forward Error Correction)
	Authentication	CHAP, EAP
	Firewall	Port Forwarding IP Filtering MAC Filtering DoS Attack Prevention
	Reliability	Loopback Dying-Gasp Dual Mirror System
ETHERNET SPECIFICATIONS		
Estándares		IEEE802.3 / IEEE802.3au / IEEE802.3x
Interfaces		4 ports 10/100/1000BASE-T port. RJ45 Connector Auto negotiation Auto MDI/MDIX
Networking		NAT/NAPT IPv4 & IPv6 Dual Stack DMZ DNS Relay VPN Transparent, PPTP, L2TP
WIFI SPECIFICATIONS		
Standard		IEEE 802.11b/g/n/ac/ax
Frequency		2.4 GHz / 600Mbps & 5.8 GHz 2400Mbps - Total= 3000Mbps
Antenna		4 external. Gain 5dBi
EIRP		Max 25dBm
Others		Up to 5 possible SSID's per band Up to 64 simultaneous connections WEP, WPA-PSK, WPA2-PSK (AES, TKIP) Security MAC filtering
POTS TELEPHONY SPECIFICATIONS		
REN		Max 5REN
Conector		1 port RJ11
Call Voltage		65V RMS
Protocols		SIP / MGCP G.711 (A- & u-), G.729, G.726 codec DTMF Calling Echo suppression support, VAD, CNV Call identification, hold call, forward call, 3-users call T.30 & T.38 FAX
USB		
Funtion mode		Host / device
Current		Max 1A
GENERAL SPECIFICATIONS		
Working temperature		-5~45°C
Voltage		12V DC1.5A max
Consumption		<18W
Net weight		260g
Dimensions		199x134.5x35mm

*The ONT supports a maximum of 16 VLANs, 15 for general purpose and 1 for management. The 15 general purpose VLANs can be assigned to any of the ONT's physical interfaces (4 Ethernet ports, 8 SSIDs, and the VOIP interface for the POTS port) available on the ONT. The ONT's physical interfaces operate in access mode, therefore, they can only carry untagged traffic of a VLAN. A VLAN can be assigned to one or multiple physical interfaces simultaneously.

*The ONT features a special option, vlan binding, which allows configuring one of the Ethernet ports in trunk mode to carry tagged traffic from multiple VLANs simultaneously. VLANs configured on this port cannot be used on another interface.

Optimised
for FTTR
networks in
hotels


3000 Mbps
(600 + 2400)

16 VLANs
per ONT

VLAN
binding

Optimisation
Multicast and
mDNS

APPLICATION EXAMPLE

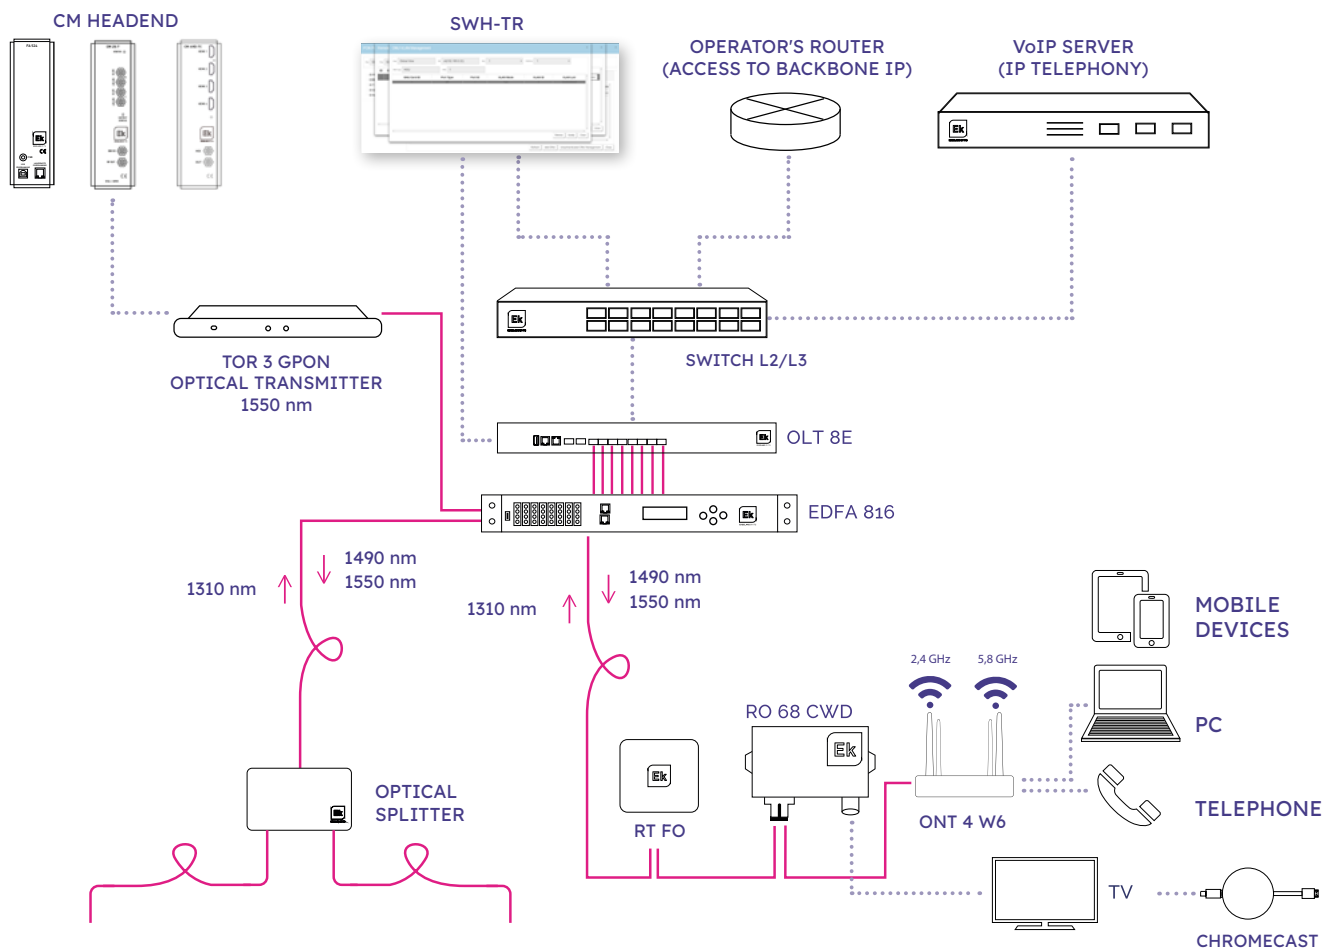

PoE GPON OPTICAL NETWORK TERMINAL


ONT 4 POE CP

- / GPON optical network terminal and gateway for residential and SOHO business use
- / 4 auto-sensing 10/100/1000BASE-T Ethernet ports with 48V PoE power supply
- / Includes 2 analog telephone ports (POTS) RJ 11
- / Compatible with ITU-T G.984.x standard, it meets all requirements for access to FTTH/FTTR ultra-broadband networks.
- / Maximum downstream speed of 2.5 Gbps and upstream speed of 1.25 Gbps
- / Enables access to ultra-broadband services
- / Local and remote management. OMCI, Web, and CLI
- / Compatible and interoperable with Ekselans OLTs
- / Ability to flexibly configure Ethernet ports in HGU or SFU mode
- / Possibility of configuring POTS ports and Ethernet ports configured in HGU mode via TR069.



REFERENCE	ONT 4 POE CP
Code	310047
GPON FEATURES	
Transfer speed	Downstream: 2.488Gbps / Upstream: 1.244Gbps
Connector	SC/APC
Optics	ITU-T G.984.2 Class B+
Standards	ITU-T G.984.x (G.984.5 support) FCC 47 CFR Part 15, Class B FDA 21 CFR 1040.10 & 1040.11, Class I IEEE 802.3 Ethernet 802.1 q/p VLANs
Wavelengths and power	Downlink: Wavelength: 1490 nm Sensitivity: -28dBm Saturation: -8dBm Uplink: Wavelength: 1310 nm Transmission power: 0.5 ~ 5dBm
Type of optical fiber	G.652 Single-mode
Others	32 T-CONTs 256 GEM Flexible mapping between GEM ports and T-CONTs Upstream & downstream FEC Activation with automatic SN and password discovery AES-128 encryption with key generation and switching 802.1p upstream service FEC (Forward Error Correction)
ETHERNET FEATURES	
Standards	IEEE802.3 / IEEE802.3au / IEEE802.3x
Interfaces	4 ports 10/100/1000BASE-T. RJ45 connector Auto negotiation Auto MDI/MDIX 100 meters away 48V PoE power supply Total maximum power 60W (maximum 30W per port)
Router functionality (switching and routing)	Bridging & Switching (802.1d / 802.1q) 8 traffic classes (802.1p) 802.3n flow control VLAN tagging and filtering VLAN stacking (Q-in-Q) IGMP multicast for IPTV video IGMP snooping RSTP IPHOST SSH QOSSP, WRR, SP+WRR Port Mirror
POTS TELEPHONE FEATURES	
REN	Max 5REN
Connector	2 RJ11 ports
Rated voltage	65V RMS
Protocols	SIP / MGCP G.711 (A- & u-), G.729, G.726 codec DTMF call Supports echo cancellation, VAD, DNI Caller ID, call waiting, call forwarding, three-way calling T.30 & T.38 FAX
GENERAL CHARACTERISTICS	
Operating temperature	-30~55°C
Food	48V DC / 1.35A (64.8W)
Dimensions	6 x 4.5 x 1.2 inches
Weight	500g (approx.)

APPLICATION EXAMPLE

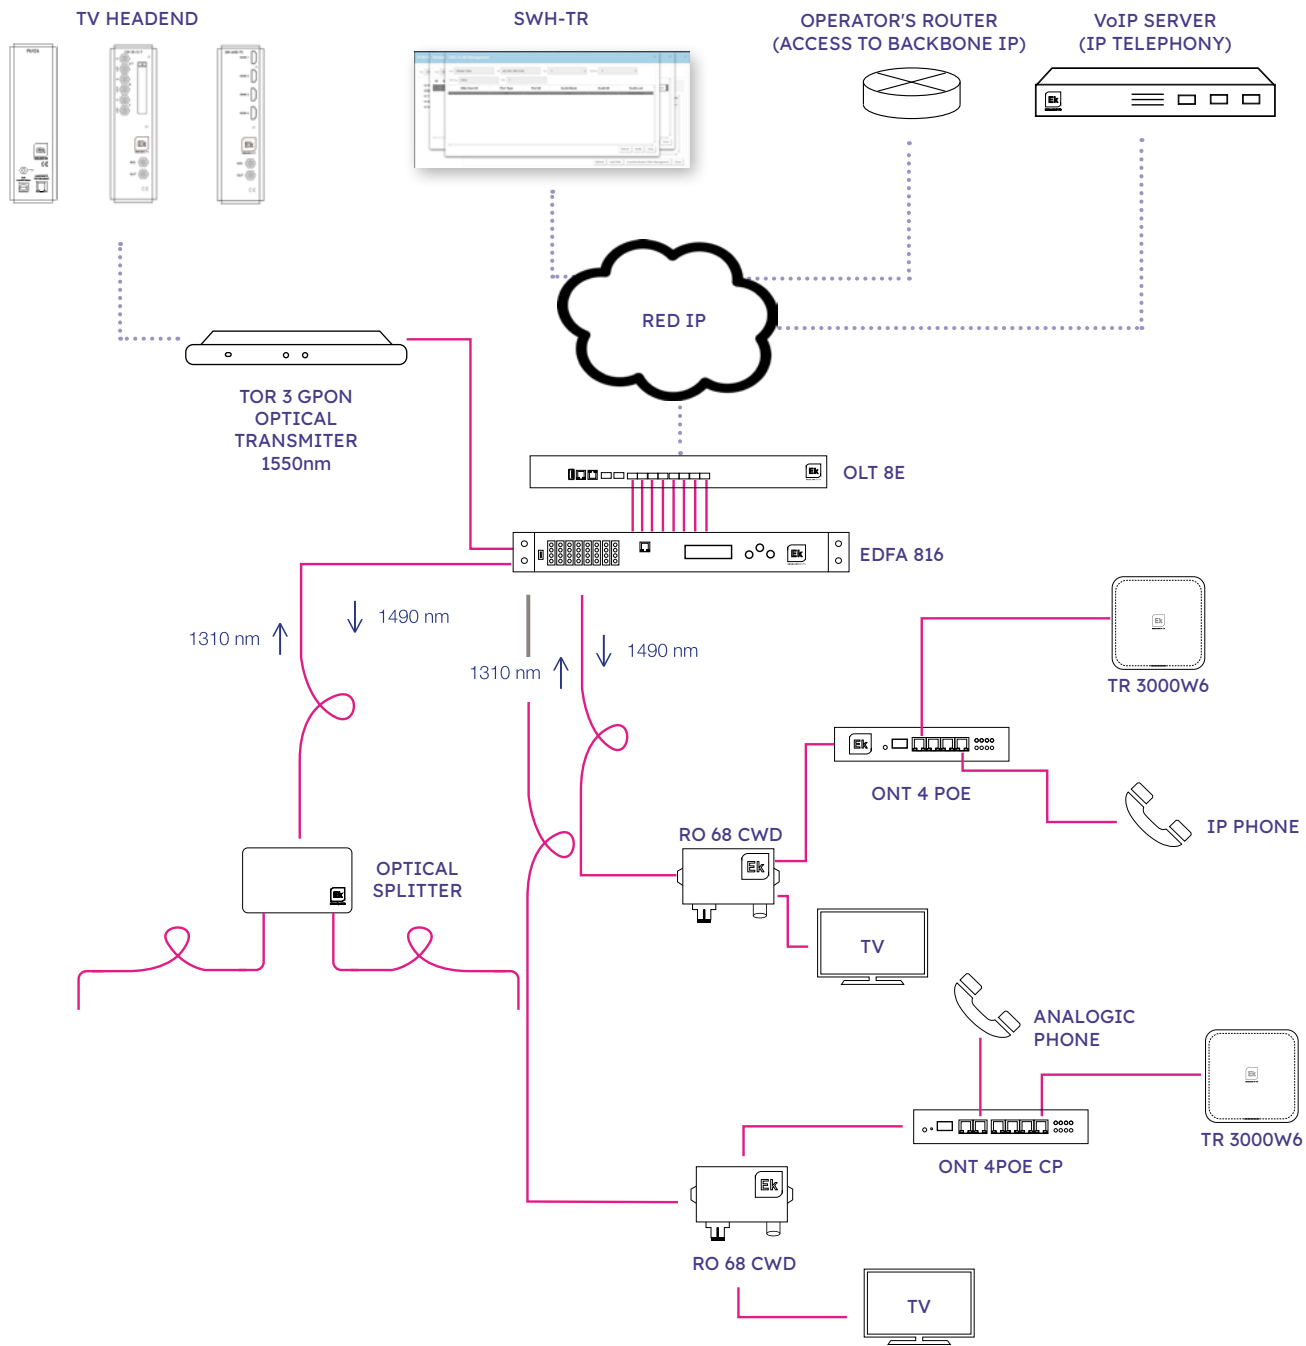

OPTICAL RECEIVERS FOR GPON INSTALLATIONS

RO 68 CWD · RO 88 CWD RO 65 FI CWD · RO 90 FI CWD

- / It allows the reception of optical signal and can continue distributing it in radio frequency
- / Compatible with GPON networks. Wavelength step 1310/1490 nm
- / RO 68 CWD: passive behavior. Does not need power

REFERENCIA		RO 68 CWD	RO 88 CWD	RO 65 FI CWD	RO 90 FI CWD
Código		270005	270004	270006	270007
OPTICAL INPUT					
Wavelength	nm	1540 - 1563	1540 - 1563	1540 - 1563	1540 - 1563
Pass wavelength	nm	1310 / 1490	1310 / 1490	1310 / 1490	1310 / 1490
Optical input level	dBm	0 / -10	+2/ -20	0 / -10	+3/-15
AGC range	dBm	-	0 / -12	-	+2/-7
Efficiency	A/W	≥0,9/1550 nm	≥0,85/1310 nm ≥0,9/1550 nm	≥0,9/1550 nm	≥0,9/1310 nm ≥0,95/1550 nm
Optical return loss	dB	>45	>45	>45	>45
Optical connector	-	SC/APC (IN/OUT)	SC/APC (IN/OUT)	SC/APC (IN/OUT)	SC/APC (IN/OUT)
RF OUTPUT					
Frequency range	MHz	47 - 1000	47 - 1000	47 - 2350	47 - 2150
Flatness	dB	± 1	± 0,75	± 1,5	± 0,75
Output level	dBμV	62 @ -1dBm*	>80 (AGC)*	60 @ -1dBm**	>80 (AGC)**
Output level regulation	dB	-	0 - 20	-	0 - 20
MER	dB	≥31dB	≥31dB	≥31dB	≥31dB
VBER	-	1E-8	1E-8	1E-8	1E-8
Return loss	dB	≥14	≥14	≥14	≥14
Output connector	-	F	F	F	F
GENERAL					
Voltage feeding	Vdc	Not required	12 (PSU included)	Not required	12 (PSU included)
Dimensions	mm	73 x 103 x 23			
Power consumption	W	-	≤1	-	≤1
Working temperature	°C	-20 / +55	-20 / +55	-20 / +55	-20 / +55




RO 68 CWD



RO 88 CWD

APPLICATION EXAMPLE

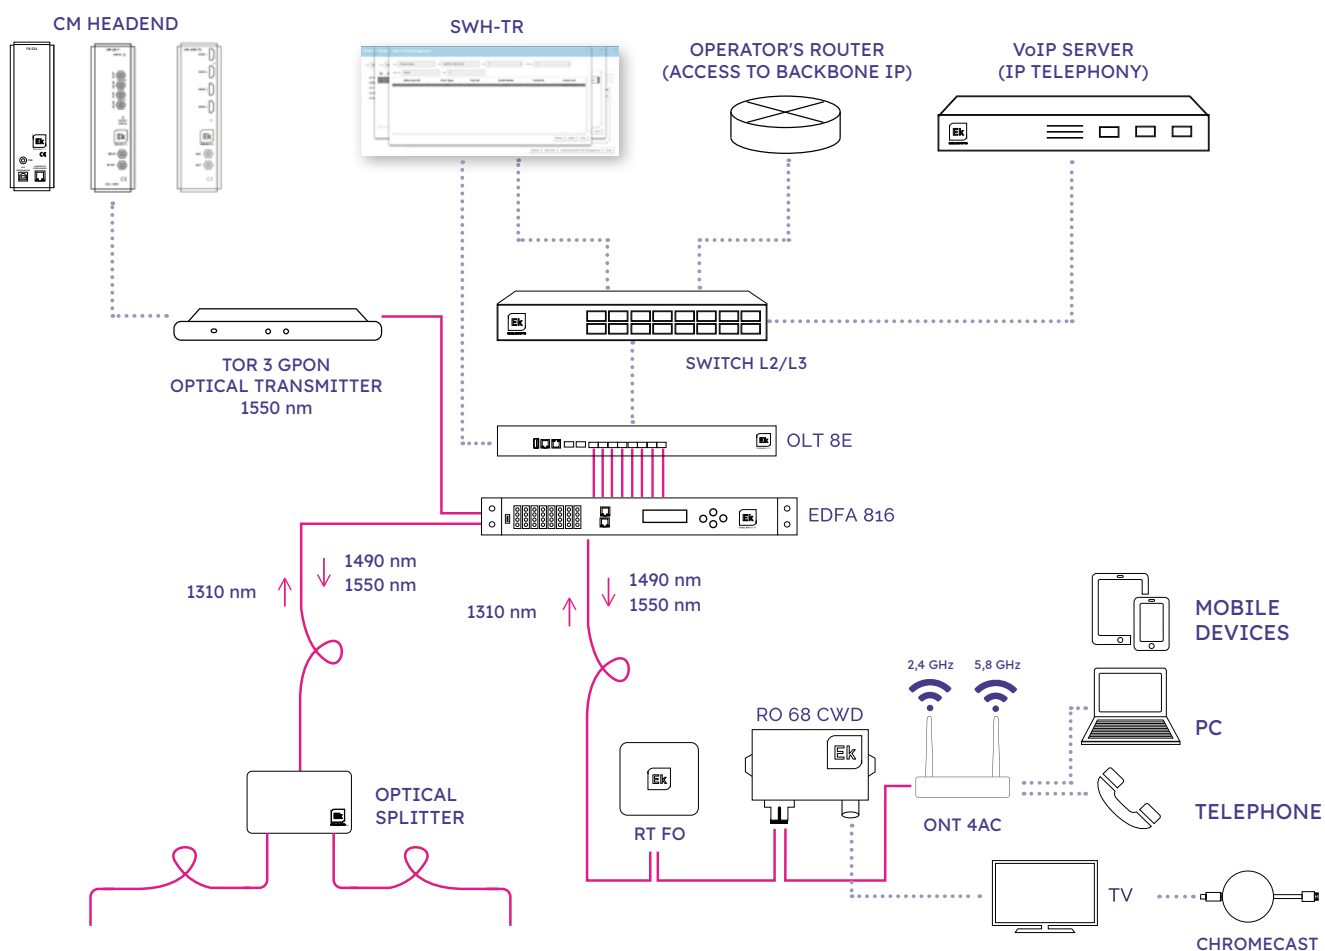

GPON PoE OPTICAL NETWORK TERMINAL


ONT 4 POE IN

REFERENCE	ONT 4 POE IN
Code	310037
GPON SPECIFICATIONS	
Transfer speed	Downstream: 2.488Gbps / Upstream: 1.244Gbps
Connector	SC/APC
Optical	ITU-T G.984.2 Clase B+
Class B+ Standards	ITU-T G.984.x (G.984.5 support) FCC 47 CFR Part 15, Class B FDA 21 CFR 1040.10 & 1040.11, Class I IEEE 802.3 Ethernet 802.1 q/p VLANs
Optical wavelength and power	Downlink: Wavelength: 1490nm Sensitivity: -28dBm Saturation: -8dBm Uplink: Wavelength: 1310nm Transmission power: 0.5 ~ 5dBm
Fiber mode	G.652 Monomodo
Others	32 T-CONTs 256 GEM Flexible mapping between GEM ports and T-CONTs Upstream and downstream FEC Automatic discovery of SN and password activation AES-128 encryption with keys generation and commutation 802.1p service upstream FEC (Forward Error Correction)
ETHERNET SPECIFICATIONS	
Standards	IEEE802.3 / IEEE802.3au / IEEE802.3x
Interfaces	4 ports 10/100/1000BASE-T port. RJ45 Connector Auto negotiation Auto MDI/MDIX 100m de distance 48V PoE power supply 60W max power consumption
Router functionality (switching & routing)	Bridging & Switching (802.1d / 802.1q) 8 traffic classes (802.1p) 802.3n flow control VLAN tagging and filtering VLAN stacking (Q-in-Q) IGMP multicast for IPTV IGMP snooping RSTP IPHOST SSH QOSSP, WRR, SP+WRR Port Mirror
GENERAL SPECIFICATIONS	
Working temperature	-30°C / 65°C
Power supply	12V DC1.5A max
Dimensiones	222 x 56 x 200 mm
Peso	2000g (aprox.)

- / GPON network terminal specifically designed for industrial environments and outdoor installations that demands high mechanical and electrical specifications
- / Aluminum metallic box format with epoxy painting, with reinforced mounting bracket for electrical panels and outdoor distribution cabinets installation
- / Specific design to withstand a operating temperature environment up to 65°C
- / 1 SC/APC connector
- / 4 RJ45 10/100/1000Mbps self-adaptive ports with 48Vdc PoE power supply (max 60W)
- / Front panel with 12 status LEDs and reset button
- / Internal power supply in metallic box format, IP67 waterproof, input range 100-305Vac 47-63Hz, 96W power, typical efficiency 90% and CE, BIS, CCC, RCM, KCC, ENEC, EAC, UKCA certificates and UL
- / ONT compatible and interoperable with Ekselans OLTs
- / ONT developed according to IT-TG.984 standards and fully compatible and manageable from the SWH-TR-V, real-time monitoring software of GPON equipment for public lighting network
- / ONT with encryption support, individualized for each unit installed in a FTTH network, of received data from the OLT using Advanced Encryption Standard 128 (AES128) algorithm
- / SFU (Switch Fabric Unit) type ONT with IP address management assigning option for monitoring in third-party tools
- / Final product designed and assembled in Spain



APPLICATION EXAMPLE

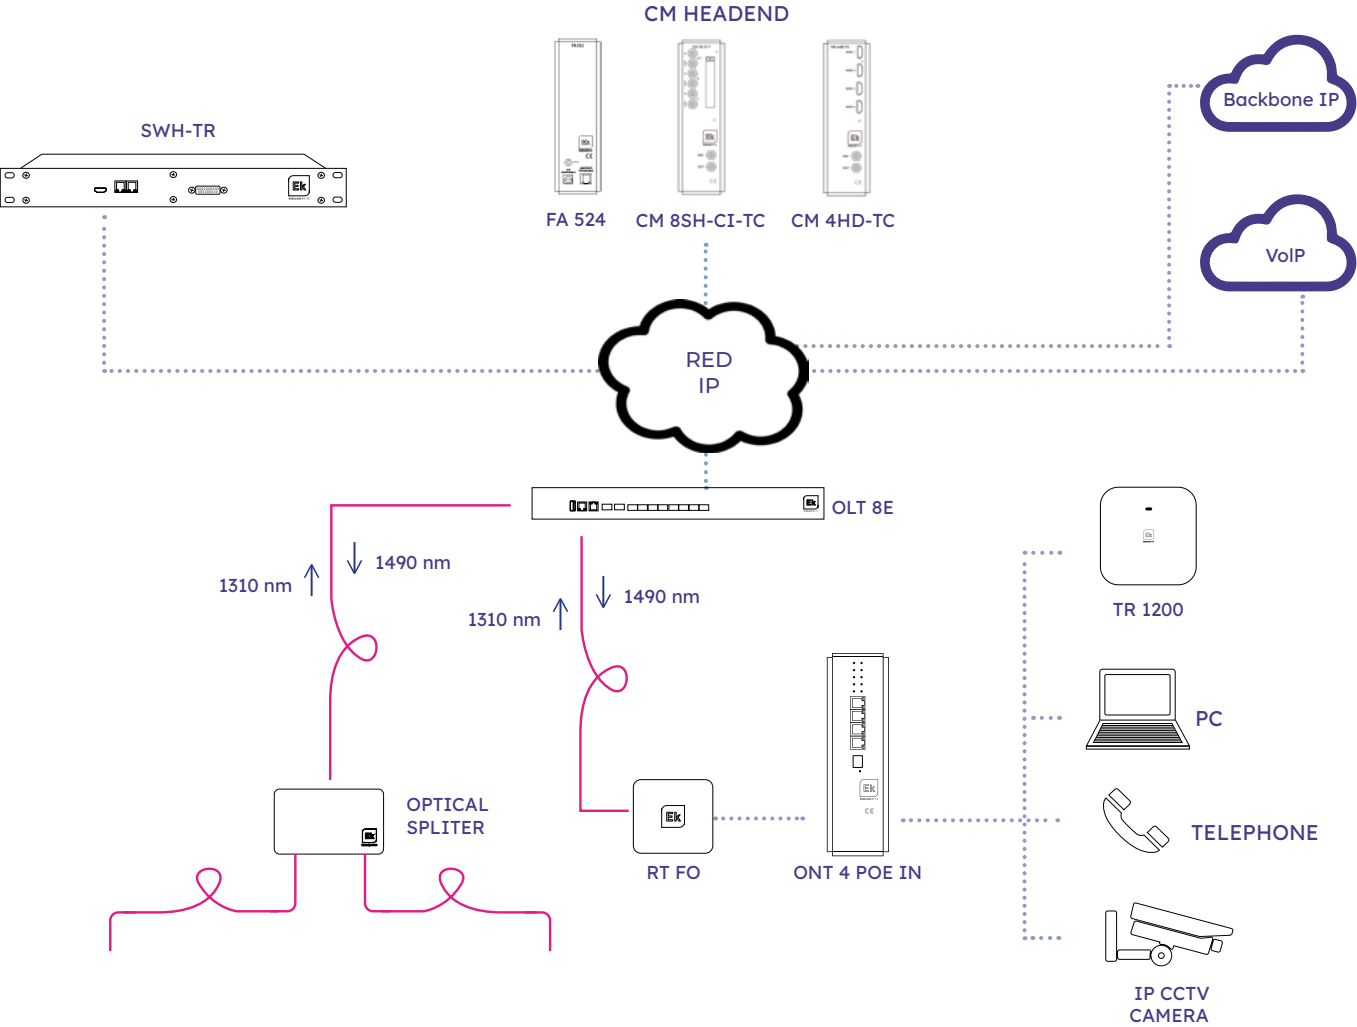

GPON/ETHH OPTICAL NETWORK TERMINAL


ONT IN

- / Optical Network Unit and gateway for industry sector
- / 4x Autoadaptive 10/100/1000 Base-T Ethernet ports
- / Compatible with ITU-T G.984.x standard. Meets all requirements for creating ultra high speed FTTH networks
- / 2,5Gbps maximum downlink / 1,25 Gbps uplink speed
- / Allows access to ultra-broadband services: internet, VoIP and IPTV
- / Local and remote management. OMCI, Web, CLI, SNMP and SWH servers
- / Compatible and interoperable with the Ekselans OLTs



REFERENCE	ONT IN
Code	310029
Transfer speed	Downstream: 2.488Gbps Upstream: 1.244Gbps
Connector	SC/APC
Optical	ITU-T G.984.2 Clase B+
Standards	ITU-T G.984.x (G.984.5 support) FCC 47 CFR Part 15, Class B FDA 21 CFR 1040.10 & 1040.11, Class I IEEE 802.3 Ethernet 802.1 q/p VLANs
Optical wavelength and power	Downlink Wavelength: 1490nm Sensitivity: -28dBm Saturation: -8dBm Uplink Wavelength: 1310nm Transmission power: 0.5 ~ 5dBm
Fiber mode	G.652 Monomodo
Others	32 T-CONTs 256 GEM Flexible mapping between GEM ports and T-CONTs FEC upstream & downstream Automatic discovery of SN and password activation AES-128 encryption with keys generation and conmutation 802.1p service upstream FEC (Forward Error Correction)
Power supply	12 Vdc 1,5A max.
ETHERNET SPECIFICATIONS	
Standards	IEEE802.3 / IEEE802.3au / IEEE802.3x
Interfaces	4 ports 10/100/1000BASE-T. Conector RJ45 Auto negotiation Auto MDI/MDIX
Router functionality (switching & routing)	Bridging & Switching (802.1d / 802.1q) 8 traffic classes (802.1p) Flow control 802.3n VLAN filtering and labeling VLAN stacking (Q-in-Q) IGMP multicast for IPTV video IGMP snooping RSTP / IPHOST /SSH QOS-SP, WRR, SP+WRR Port Mirror
Industrial features	Compatible with industrial PLC systems
WIFI SPECIFICATIONS	
Standard	IEEE 802.11 b/g/n (Up to 300 Mbps transfer rate)
Antenna	SMA connectors for 2.4/5 GHz WiFi antennas
EIRP	Max 25 dBm
Others	Up to 4 possible SSID's per band Up to 64 simultaneous connections WEP, WPA-PSK, WPA2-PSK (AES, TKIP) Security MAC filtering

APPLICATION EXAMPLE

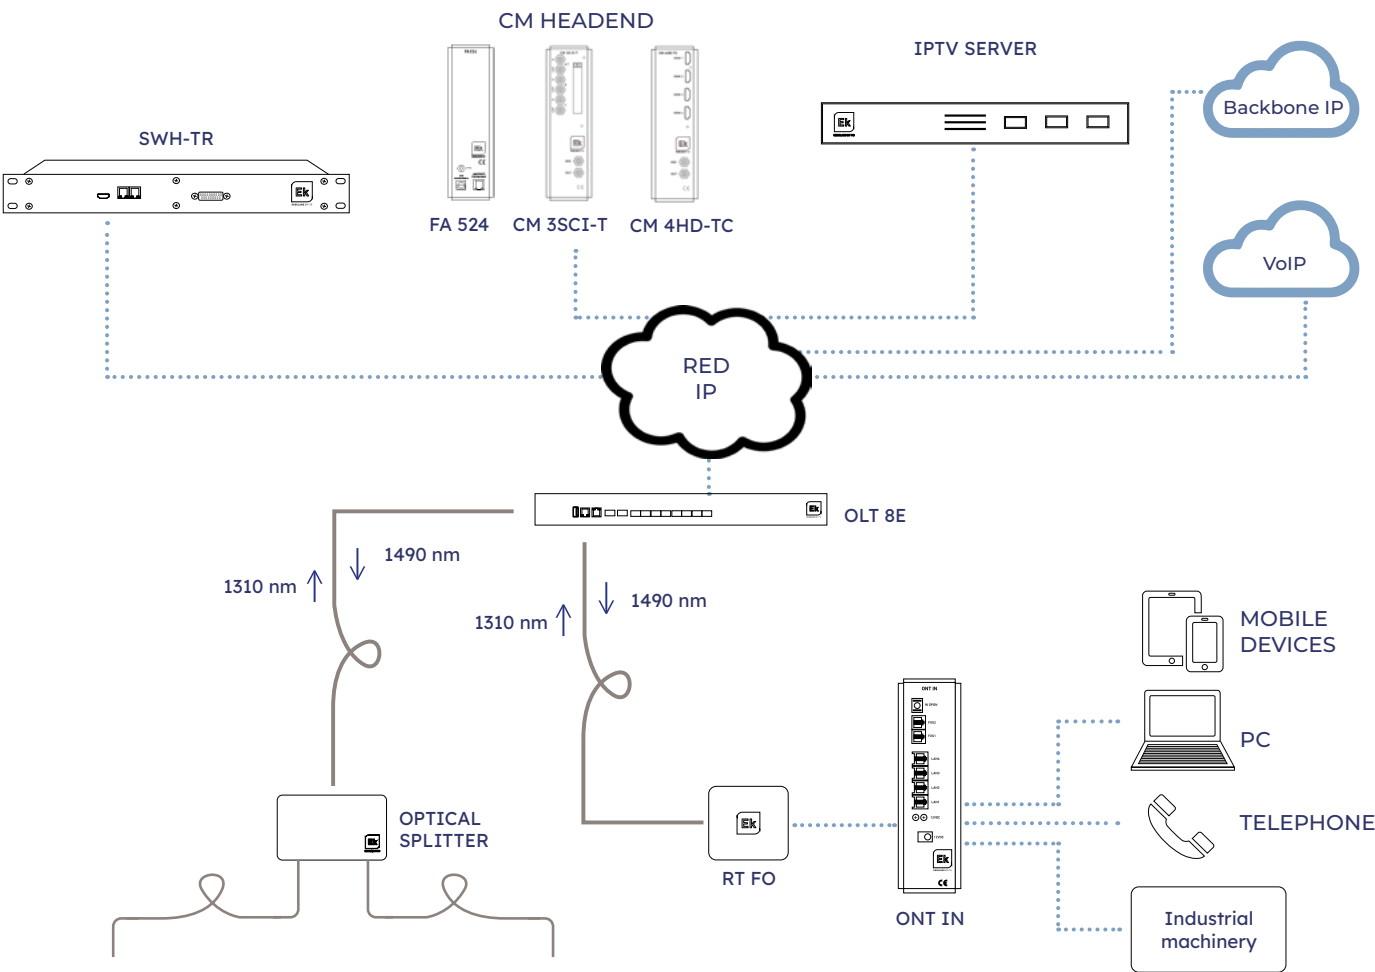


ONTs UPS

UPS 16 · UPS 32

- / Uninterruptible Power Supply
- / Effective management of the battery charging process
- / Stackable with other units for greater autonomy
- / Protected against overvoltages and short circuits
- / Switch for battery disconnection
- / Do not forget to connect the batteries


REFERENCE	UPS 16	UPS 32
Code	312001	312002
Maximum input voltage	13 V	
Minimum input voltage	9 V	
Rated output voltage	12 ± 5% V	
Maximum output current	1000 mA	
Batteries	2x 2200 (LiPo) mAh	4x 2200 (LiPo) mAh
Capacity	16 Wh	32 Wh
Working temperature	10 ÷ 40 °C	
Storage temperature	-5 ÷ 50 °C	
Maximum humidity	<90 % Hum	
Dimensions	23 x 15 x 3 cm	

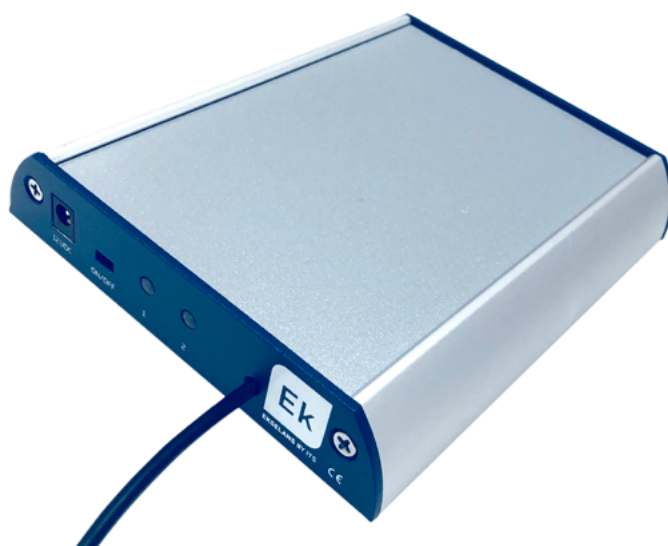


UPS 16 · UPS 32

ACCESSORIES FOR GPON NETWORKS

- / Racks and Accessories
- / Fiber trays for 19" rack
- / Fiber distribution box
- / Fiber distribution box
- / Fiber cables
- / Pigtails, patch-cords, Fiber optics terminal boxes and other accessories
- / Two-zone plastic cabinet. 4 trays for splices. 2 doors. SCF 32 splitter mounted

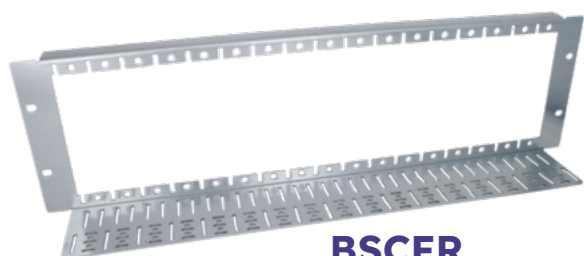

BSCFR

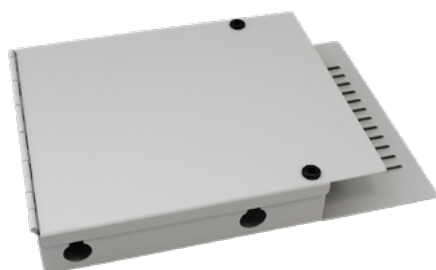

RS 24-12



SCF 32




ARS 12



BF 24E




RPG 32



CFD 16

More information in www.ek.plus

GPON BY EK: FTTH / FTTR FIBER OPTIC NETWORKS SOLUTION

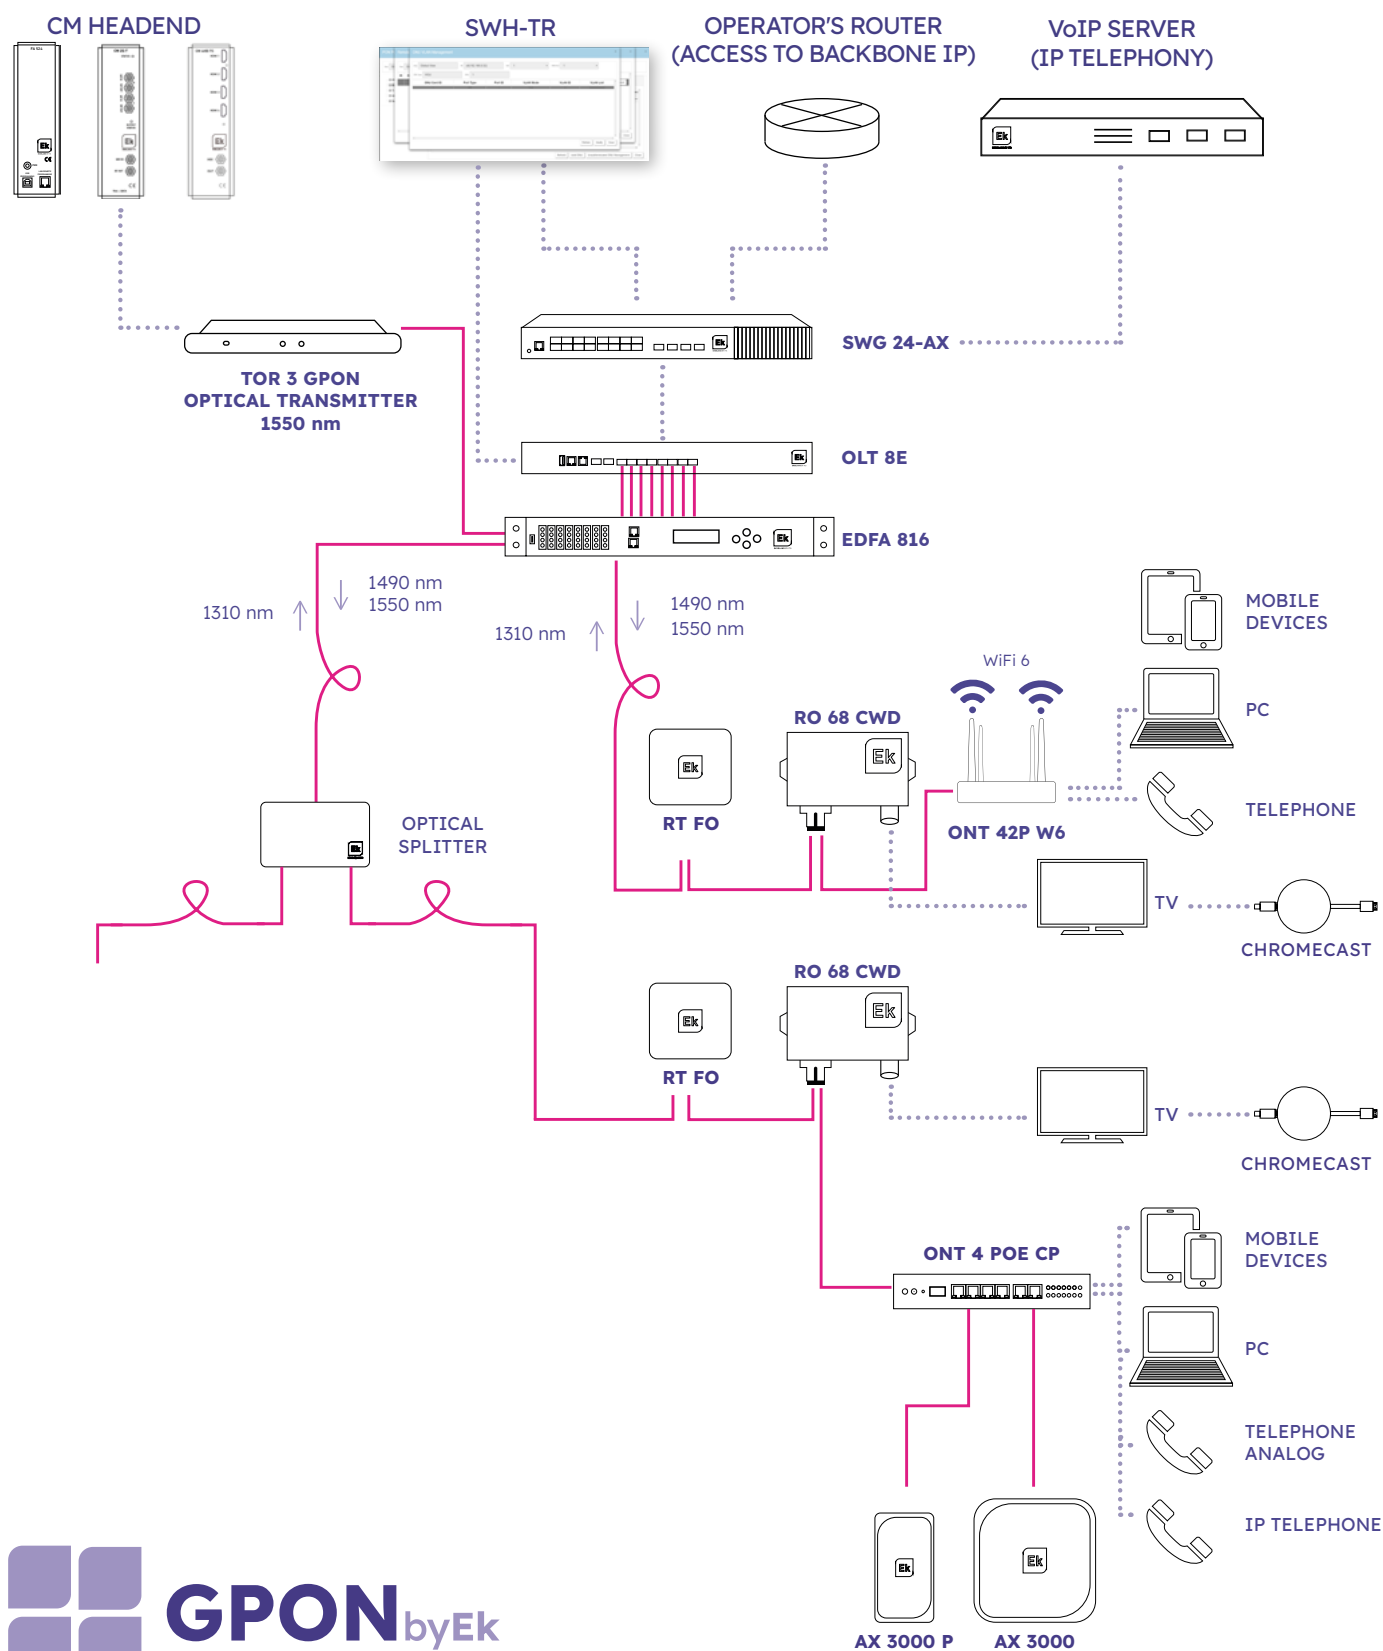

ADALTRA

— we make the connection —



ADALTRA IBERIA S.L.U.
EK · OPENETICS
Av. Cerdanyola 79-81 Local C
08172 Sant Cugat del Vallés
Barcelona (España)
+34 93 583 95 43 · +34 937 848 212
info@ek.plus · info@openetics.com
www.ek.plus · www.openetics.com
www.adaltra.com