

05212 / 05213/ 05215


OS2

B2_{ca}

OS2 LSZH B2ca dielectric fiber optic cable, G-652

DESCRIPTION

High-performance fiber optic cable for video, voice, and data transmission. The manufacture of these cables is subject to strict safety regulations, complying with the most demanding international certification standards with a new Slim structure.

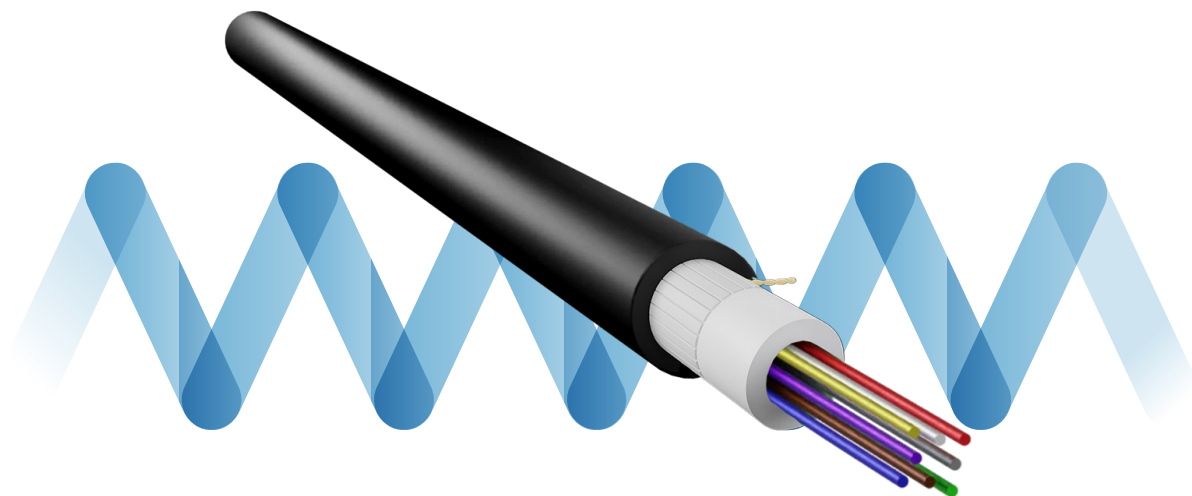

APPLICATIONS

- Intercommunication between racks, thanks to its new reduced diameter Slim format.
- Connection between panels and voice and data points.
- Short-distance distribution to terminals.
- General indoor and outdoor use in local area networks (LAN) and video.
- FTTx cabling

OPENETICS
/ ADALTRA

Updated on: December 15, 2025

This document is confidential and the property of ADALTRA. ADALTRA owns the copyright and the document may not be copied or modified in any way, in whole or in part, without the written permission of ADALTRA. The features described in this document are not contractual and are subject to change without notice.

APPLICATIONS

- Compact, lightweight, highly flexible, robust, and durable.
- Easy to peel (gel-free).
- Fully dielectric.
- Reduced diameter.
- Direct connection.
- Savings on installation costs.
- Halogen-free, low smoke emission, and flame retardant.
- UV resistant.
- Protected from rodents.
- Compatible with the complete range of fiber optic components.

REGULATIONS

Mechanical and thermal tests according to:	Fire test according to:
EN 187000	UNE-EN 50266 (IEC 60332-1-2-3-24)
IEC 60794-1-2 / F1	UNE-EN 50267 (IEC 60754-2)
EN 50399	UNE-EN 50268 (IEC 61034)
ENE-EN 60793-2-10 / -50	Reaction to fire B2ca

TECHNICAL SPECIFICATIONS

Fibers:	8, 12, and 24
Center tube diameter:	8–12 fibers: 3 mm / 24 fibers: 3.5 mm
Traction elements:	WB reinforced glass fibers (water blockers)
Aarmor:	Fiberglass
Outer cover:	LSZH / UV thermoplastic
Color:	Polyolefin - Black
Weight (kg):	8 fibers: 52 / 12 and 24 fibers: 64
Outer diameter:	8 fibers: 7 mm / 12 and 24 fibers: 7.5 mm
Maximum operating load / Inst (N):	800 N / 1200 N
Compressive strength (N/10 mm):	1000 (10 min)
Temperature range:	Operating temperature: -30°C to +60°C / Installation temperature: -20°C to 60°C
Minimum curvature radius:	15 x outer diameter
Maximum coil length (m):	8 fibers: 4000 / 12 and 24 fibers: 2000
Fiber color:	Red, green, yellow, blue, white, violet, orange, black, gray, brown, pink, turquoise
Color of fibers with 1 ring:	Red, green, yellow, blue, white, violet, orange, black, gray, brown, pink, turquoise

PHYSICAL SPECIFICATIONS

Core size:	9 microns
------------	-----------

GEOMETRIC SPECIFICATIONS

Coating diameter:	125 ± 0.70 µm
Coating diameter (uncolored):	242 ± 7 µm
Core/coating concentricity error:	≤ 0.6 µm
Concentricity error of the coating/lining:	≤ 12 µm
Validity of the coating:	≤1.0%

OPTICAL SPECIFICATIONS

Attenuation:	1550 nm \leq 0.21 dB/km 1625 nm \leq 0.23 dB/km 1525–1575 nm \leq 0.03 dB/km
Zero dispersion point:	\leq 0.092 ps/(nm ² ·km)
Zero dispersion slope:	1300–1324 nm
Chromatic dispersion at 1550 nm	\leq 18.6 ps/(nm ² ·km)
Chromatic dispersion at 1625 nm	\leq 23.7 ps/(nm ² ·km)
PMD single fiber	\leq 0.20 ps/ $\sqrt{\text{km}}$
Cable cutoff wavelength:	\leq 1260 nm

MECHANICAL SPECIFICATIONS

Stress test:	0.69 GPa
Twisting:	5 turns of 180° on a 1 m sample, in both directions.
Impact resistance:	4.4 J; 3 \times 2 times \leq 0.05 dB (1550 and 1625 nm)
Minimum radius of curvature:	20 \times D \leq 0.10 dB (1550 and 1625 nm)
Peeling force [F] (maximum value):	1.3 N \leq F \leq 8.9 N
Fatigue [ns]:	\geq 20

ENVIRONMENTAL SPECIFICATIONS

Attenuation induced by:	1550 and 1625 nm
Between -60°C and +85°C temperature cycle:	\leq 0.05 dB/km
+85°C, 85% RH, Humid heat:	\leq 0.05 dB/km
+85°C, Dry heat:	\leq 0.05 dB/km
+23°C Immersion in water:	\leq 0.05 dB/km

COMMERCIAL INFORMATION

P/N	DESCRIPTION	USE	COVER	Ø FIBER	NO. OF FIBERS	LENGTH (M)
05212	OS2 dielectric fiber optic cable, B2Ca, G-652	interior / outside	LSZH	9/125 µm	8	1
05213	OS2 dielectric fiber optic cable, B2Ca, G-652	interior / outside	LSZH	9/125 µm	12	1
05215	OS2 dielectric fiber optic cable, B2Ca, G-652	interior / outside	LSZH	9/125 µm	24	1