


FILTRES LTE FE 782 / FI 778/ FI 786

Faible affaiblissement dans la bande passante
Haute rejection sur la bande LTE
Entrée / sortie réversibles


RÉFÉRENCE		FE 782	FI 778	FI 786
Code		031001	031002	031003
Bande passante	MHz	5 - 782	5 - 778	5 - 786
Affaiblissement de passage	dB 5-760 MHz	<1	<1,2	<0,8
	dB 778 MHz	<1,6	<2,7	<1,3
	dB 782 MHz	<2,7	<5	<1,5
	dB 786 MHz	<5	>15	<2,7
	dB 790 MHz	>17	>25	≤5,8
Bande réjectée	MHz	783-862	779-862	787-862
Réjection	dB 791 MHz	>19	>27	>7,5
	dB 796 MHz	>28	>30	>25
	dB 804 MHz	>40	>37	>32
Passage de courant	mA	300 mA	300 mA	300 mA

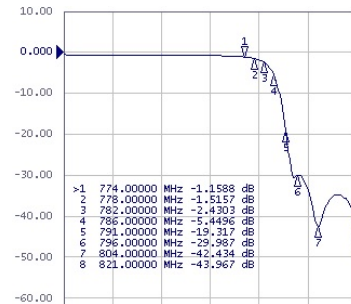

FE 782



FI 778

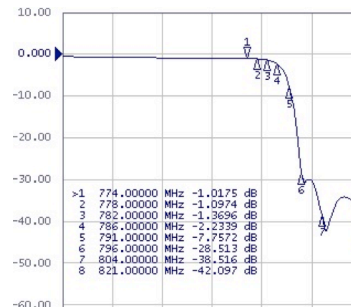

FI 786



FE 782



FI 778 / FI 786



APPLICATION