

RACK CABINETS

Smart Rack Plus Connect Secure 19” Floor-Standing Rack Cabinet

New
Design

New
Packaging

SR⁺_{ACK}
Connect secure

DESCRIPTION

High-performance rack with Wi-Fi connectivity, hysteresis control, alarm notifications sent to the Ek Smart app, door-opening sensor protection, and a load capacity of up to 800 kg for networking and communications equipment. Elegant design and easy to set up in a battery configuration. Includes 4 height-adjustable feet, 4 casters, 1 ventilation panel (4 fans) with a digital thermostat, and 1 fixed 1U shelf. Tempered glass or perforated metal door for improved ventilation, and removable, lockable side panels. Standard color: Black RAL 9005. Other RAL colors available upon request.



APPLICATIONS

- Electronics
- Networks
- Communications
- Fiber distribution
- Servers weighing up to 800 kg

OPENETICS
/ ADALTRA

Updated on: 15 septiembre 2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without ADALTRA's written permission. The specifications set forth in this document are not binding and are subject to change without notice.

ADVANTAGES

- Sturdy and elegant design.
- Easy to install in a battery bank.
- Front door made of tempered glass or perforated metal, with a lock and key.
- Reversible sheet-metal rear door with a lock and key.
- Easily removable side panels with a lock and key.
- Ample cable entry capacity at the floor and ceiling.
- Front vertical cable guides with hinged covers for 800-mm-wide cabinets.
- Designed for the installation of vertical PDUs without taking up “U” space.
- Numbered, adjustable front and rear “U”-shaped guides.
- Adjustable feet (4).
- Wheels (4).
- Ventilation panel (4 fans) with a digital thermostat.
- Fixed tray, 1 unit
- Ground connection included
- 19-inch Wi-Fi unit for temperature control and alarms via EK Smart.
- Door-opening sensor.
- A full range of accessories is available.
- IP20 protection rating.
- Warranty: 5 years.

REGULATIONS

Dimensions and Format of 19” Racks	DIN 41.488 Part 1
Mechanical components and rack accessories	DIN 41.494, Parts 7 and 8
Dimensions and Design of Subracks and Chassis	IEC 60297-2 and 3
Racks and frames for electronic equipment	UNE 20539-1 and UNE 20539-2
U.S. Standard for 19-inch Racks	ANSI/EIA-310-D
Restriction of Hazardous Substances	RoHS
Compliance with European safety and quality directives	EC

TECHNICAL SPECIFICATIONS

Material	Cold-rolled steel UNE 36086-91
Color	Black RAL 9005 (see other available colors)
Maximum load	800 kg (600 kg for 22U, 27U, and 32U racks with a width of 600 mm)
Height	1081 mm / 1303 mm / 1525 mm / 1970 mm / 2192 mm
Width	600 mm / 800 mm
Depth	600 mm / 800 mm / 1,000 mm / 1,200 mm
Frame Height	22 U, 27 U, 32 U, 42 U, and 47 U
Packaging unit	1

Updated on: 15 septiembre 2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without ADALTRA's written permission. The specifications set forth in this document are not binding and are subject to change without notice.

Front door	Glass, perforated, solid metal, double solid metal, or double perforated with a lock and key
Rear Door	Solid metal, perforated metal, or double perforated metal with a lock and key
19-inch Profiles	4 numbered “U”-shaped mounting rails
Side panels	Removable panels with locks
Cable entry	Greater than and/or less than
Adjustable feet	Included
Wheels	Included
Ventilation panel	Included
Fixed trays	Includes 1 fixed tray (1U)
Vertical Cable Guide with Cover and Hinges	Included in the 800-mm-wide models
Hardware	Included
Wi-Fi Connectivity	Yes
Hysteresis Control	Yes
Alarms to the EK Smart App	Yes
Door-opening sensor	Yes

COMMERCIAL INFORMATION

REFERENCE	COLOR	U NO.	STOP	WIDTH	PROF.	DOOR FORWARD	DOOR REAR
2266VCWS	Black RAL 9005	22 U	1081	600	600	Glass	Blind metal
2766VCWS	Black RAL 9005	27 U	1303	600	600	Glass	Blind metal
2768VCWS	Black RAL 9005	27 U	1303	600	800	Glass	Blind metal
2788VDCWS	Black RAL 9005	27 U	1303	800	800	Glass	Double-sided metal blank
2761VCWS	Black RAL 9005	27 U	1303	600	1000	Glass	Blind metal
3266VCWS	Black RAL 9005	32 U	1525	600	600	Glass	Blind metal
3268VCWS	Black RAL 9005	32 U	1525	600	800	Glass	Blind metal
3288VDCWS	Black RAL 9005	32 U	1525	800	800	Glass	Double-sided metal blank
3281VDCWS	Black RAL 9005	32 U	1525	800	1000	Glass	Double-sided metal blank

Updated on: 15 septiembre 2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without ADALTRA's written permission. The specifications set forth in this document are not binding and are subject to change without notice.

COMMERCIAL INFORMATION


REFERENCE	COLOR	U NO.	STOP	WIDTH	PROF.	DOOR FORWARD	DOOR REAR
4266VCWS	Black RAL 9005	42 U	1970	600	600	Glass	Blind metal
4268VCWS	Black RAL 9005	42 U	1970	600	800	Glass	Blind metal
4261VCWS	Black RAL 9005	42 U	1970	600	1000	Glass	Blind metal
4288VDCWS	Black RAL 9005	42 U	1970	800	800	Glass	Double-sided metal blank
4281VDCWS	Black RAL 9005	42 U	1970	800	1000	Glass	Double-sided blind metal
4788VDCWS	Black RAL 9005	47 U	2192	800	800	Glass	Double-sided metal blank
4781VDCWS	Black RAL 9005	47 U	2192	800	1000	Glass	Double-sided metal blank
2268PPWS	Black RAL 9005	22 U	1081	600	800	Perforated	Perforated
2766PPWS	Black RAL 9005	27 U	1303	600	600	Perforated	Perforated
2768PPWS	Black RAL 9005	27 U	1303	600	800	Perforated	Perforated
2788PDPWS	Black RAL 9005	27 U	1303	800	800	Perforated	Double perforated
2761PPWS	Black RAL 9005	27 U	1303	600	1000	Perforated	Perforated
3266PPWS	Black RAL 9005	32 U	1525	600	600	Perforated	Perforated
3268PPW	Black RAL 9005	32 U	1525	600	800	Perforated	Perforated
3288PDPWS	Black RAL 9005	32 U	1525	800	800	Perforated	Double perforated
3281PDPWS	Black RAL 9005	32 U	1525	800	1000	Perforated	Double perforated
3261PPWS	Black RAL 9005	32 U	1525	600	1000	Perforated	Perforated
4266PPWS	Black RAL 9005	42 U	1970	600	600	Perforated	Perforated
4268PPWS	Black RAL 9005	42 U	1970	600	800	Perforated	Perforated
4261PPWS	Black RAL 9005	42 U	1970	600	1000	Perforated	Perforated
4288PDPWS	Black RAL 9005	42 U	1970	800	800	Perforated	Double perforated

COMMERCIAL INFORMATION

REFERENCE	COLOR	U NO.	STOP	WIDTH	PROF.	DOOR FORWARD	DOOR REAR
4281PDPWS	Black RAL 9005	42 U	1970	800	1000	Perforated	Double perforated
4288DPDPWS	Black RAL 9005	42 U	1970	800	800	Double perforated	Double perforated
4281DPDPWS	Black RAL 9005	42 U	1970	800	1000	Double perforated	Double perforated
42812DPDPWS	Black RAL 9005	42 U	1970	800	1200	Double perforated	Double perforated
4788DPDPWS	Black RAL 9005	47 U	2192	800	800	Double perforated	Double perforated
4781DPDPWS	Black RAL 9005	47 U	2192	800	1000	Double perforated	Double perforated

TECHNICAL SPECIFICATIONS OF THE VENTILATION PANEL

Number of fans	4
Digital Thermostat	Includes Wi-Fi
Material	Rolled steel / aluminum with an anti-corrosion surface treatment, burr-free
Dimensions	368.5 x 297 x 42 mm
Weight	1 kg
Assembly	Top of the rack (ceiling)
Rated voltage	220 V AC
Frequency	50 Hz
Consumption	0.07 A / 7 W
Fan Speed	2,200 RPM $\pm$ 5%
Air Leak	1.53 CFM per fan
Noise	39 dB (A)
Maximum static pressure	3.7 mm H ₂ O
Bearing	Sleeve bearing (oil-lubricated bearing)
Service life	20,000 hours at 25°C
Estimated total flow rate of the panel	6.12 CFM (4 fans)

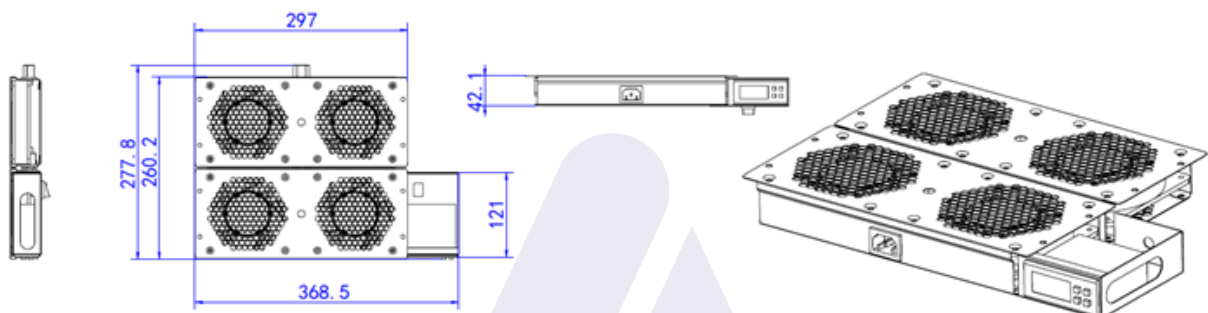


Updated on: 15 septiembre 2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without ADALTRA's written permission. The specifications set forth in this document are not binding and are subject to change without notice.


TECHNICAL SPECIFICATIONS OF THE WIFI TEMPERATURE CONTROL AND ALARM UNIT VIA THE EK SMART APP

Type	Temperature Control System with 1 Relay
Function	Smartphone-Based Monitoring and Alert System
Measuring range	-40°C to +80°C
Visualization	Digital LED Display / Ek Smart App
Food	230 (+10% -15%), 50... 60 Hz (± 3 Hz) VAC
Assembly	Integrated into the panel enclosure
Switch	Manual ON/OFF switch included
Wiring	Internal, with terminals for fans and a temperature sensor
Relative humidity	< 90% without condensation
Installation	Indoor / Enclosed rack
Analog Input	1x NTC (10 k Ω @ 25 °C, 77 °F)
Digital Output	1x Output (10A Electromechanical Relay) Fans
Degree of protection	IP65 on the front

CONNECTED

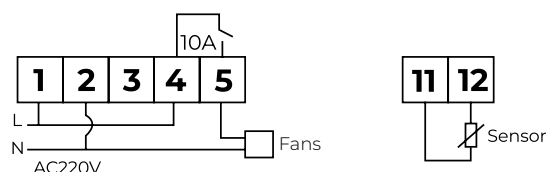

APP EK SMART

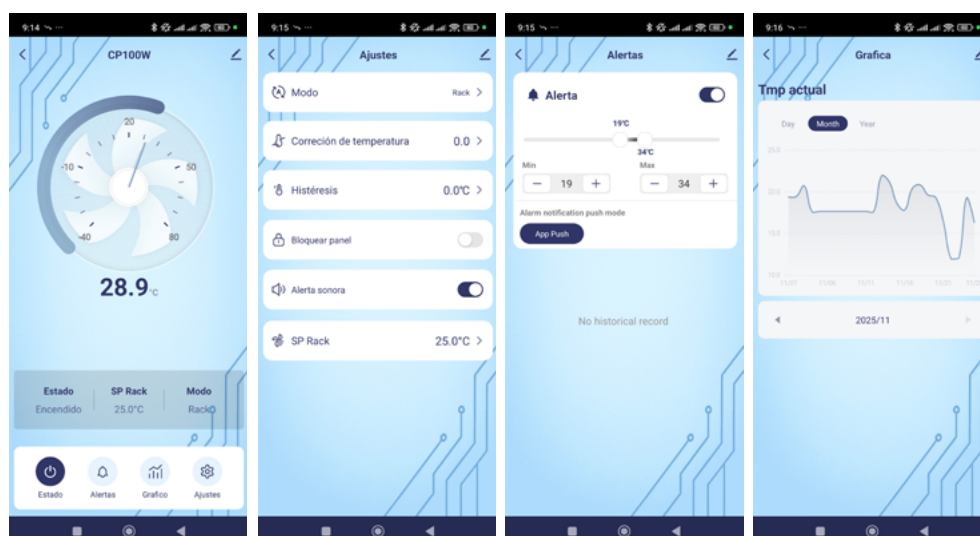

Updated on: 15 septiembre 2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without ADALTRA's written permission. The specifications set forth in this document are not binding and are subject to change without notice.