

55300

19" WiFi unit for controlling temperature and alarms via EK Smart App for Ref. 2545

SONDEK
THERM

DESCRIPTION

19" WiFi unit for temperature control and alarms via EK Smart APP for Ref. 2545



STRENGTHS

- Temperature control system with 1 relay.
Compatible with ref. 2545
- Installation in 19" racks. Occupies 1U in the rack.
- Panel-mounted installation for cooling +1 NTC probe included (1.5 m)
- 2-step setup wizard
- IP65 protection rating on front panel
- Wide operating range from -40°C to +80°C
- Indicator icons, messages, and audible sound in the event of any malfunction or error
- Smartphone control and alert system

OPENETICS
/ ADALTRA


Updated on: 11 diciembre 2025

This document is confidential and the property of ADALTRA. ADALTRA owns the copyright and the document may not be copied or modified in any way, in whole or in part, without the written permission of ADALTRA. The features described in this document are not contractual and are subject to change without notice.

FEATURES

REFERENCE	55300
Code	55300
Food	230 (+10% -15%), 50...60 Hz (±3 Hz) VAC
Measuring range	-40 to 80 °C
Analog input	1x NTC (10 KΩ @ 25 °C, 77 °F)
Digital output	1x Output (10A electromechanical relay) Fans
Degree of protection	IP65 on front panel

CONNECTION

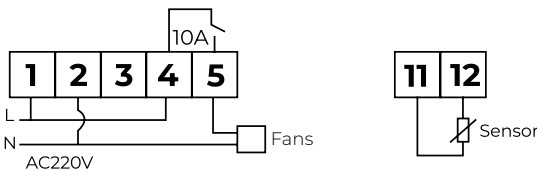

APP EK SMART

