

# ACCESS CONTROL SYSTEM WITH RFID CARDS

**CCA+ · LCA · RF KEY**



- ✓ Control unit may be fed with a wide range of AC or DC voltage
- ✓ Compatible with several types of lock (AC/DC)
- ✓ Anti-vandal card reader and waterproof (IP66). Powered from control unit.
- ✓ Adjustable opening time (1-99s)
- ✓ Expandable system
- ✓ Manual programming
- ✓ Compatible with existing installations/locks
- ✓ µSD backup (included)
- ✓ ≤5000 cards UID



**CCA+**




**LCA**



**RF KEY**

## Installation scheme

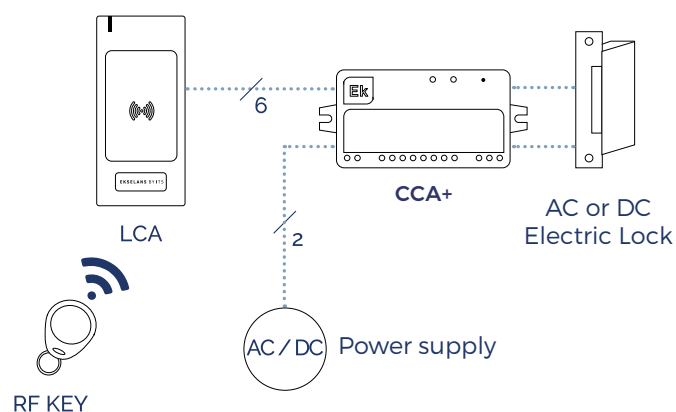



## TECHNICAL SPECIFICATIONS

REFERENCE		CCA+
Code		370005
Maximum number of users		<5000
Transmission protocol reader-control unit		Wiegand
Working voltage		
	AC	V (rms)
	DC	Vdc
Consumption (Standby/Maximum)		
	AC	mA (rms)
	DC	mA
Lock maximum consumption	A	2
Lock maximum consumption (IN-OUT)	mA	100
Maximum distance IR sensor-Keyboard	m	<10
Working temperature	°C	-40 ~ 60
Working humidity conditions	% Hum	0 ~ 90
Dimensions	mm	110 x 50 x 22

REFERENCE		LCA
Code		370002
Card type		Mifare
Frequency	MHz	13,56
Reading range	cm	3
Output protocol		Wiegand 34b
Mains voltage	Vdc	9~24
Consumption (Standby)	mA	25
Protection index		IP66
Working temperature	°C	-40 ~ 60
Dimensions	mm	103 x 48 x 19

REFERENCE		RF KEY
Code		371001
Frequency	MHz	13,56
Technology		Mifare
Quantity	PCS	5