

CM HEADEND

CM 8S-IP



- ✓ OCTO module with 4 SAT inputs and 8 tuners
- ✓ Independent control of each input 13 / 18V - 22KHz - DiSEqC (A / B / C / D)
- ✓ IP output gigabit 1Gbps SPTS / MPTS in UDP / RTP format
- ✓ Up to 64 output streams
- ✓ SAP function
- ✓ IGMP Query and IGMP Auto-Joint
- ✓ Programming via SW PC ("CM Management")
- ✓ Configuration cloning and reporting
- ✓ On-site management (FA 510 / CM PR) or remote (FA 524)




EKSELANS BY ITS



CM 8S-IP

Scheme:

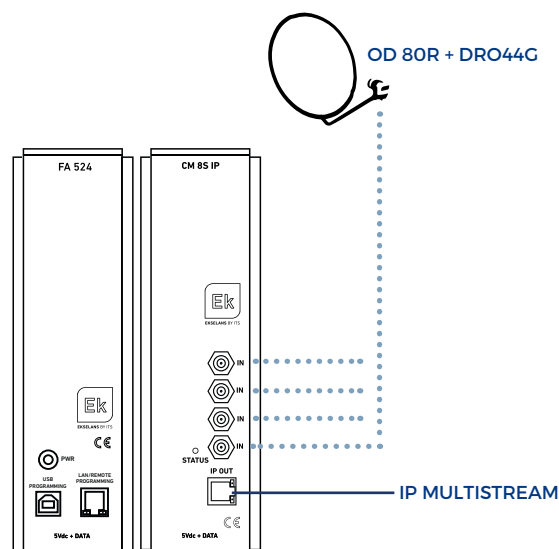

TECHNICAL INFORMATION

REFERENCE		CM 8S-IP
Code		082294
INPUT		
Number of inputs		4 x RF
RF INPUT		
Number of tuners		8
Input frequency	MHz	950 - 2150
Input level	dBμV	40 - 79
Symbol rate	Mbps	1 - 45
Modulation type		QPSK / 8PSK / 16APSK / 32APSK
Telepower	V / KHz	13/18 - 0/22
Maximum current per LNB input	mA	500
LNB's maximum total current	mA	750
DiSEqC		A / B / C / D
OUTPUT		
Connector		RJ45 - Gigabit
Routing scheme		Unicast / Multicast
Maximum services		64 (SPTS / MPTS)
Protocols		UDP / RTP / QoS / SAP
Features		IGMP Query e IGMP Auto-Joint
GENERAL		
Local programming		By USB / RJ45 cable (LAN) with FA 524 or CM PR
Remote programming		By RJ45 (Internet) (CM Key)
Power supply	Vdc	5
Consumption(No LNB, no CAM)	mA	1800
Operating temperature	°C	0 - 40

- Specifications and design are subject to change without notice

- The product meets the requirements of the CE marking. The declaration of conformity is available on the website www.ek.plus