

MECHANICAL CONNECTOR


CM SA



EKSELANS BY ITS



CM SA

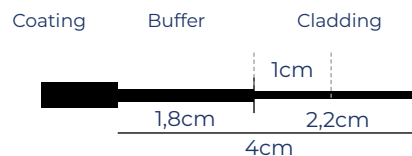

Cutting dimensions for CM SA connector

TECHNICAL TABLE

Reference		CM SA
Code		363021
Connector		SC
Polishing		APC
Ferrule		Ceramic
Tensile strength	N	30
Fibre	µm	SM - 9/125
Accepted outer diameters	mm	3mm jacket 3x2mm flat cable 2mm. (Requires using supplied yellow adapter) 900 µm. (Requires using the supplied transparent adapter)
Insertion loss	dB	≤0,2
Return loss	dB	≥45
Lifespan connections		100