





EKSELANS BY ITS

EPISSURE MECANIQUE AVEC CONNECTEUR SC/APC

CM SA



CM SA

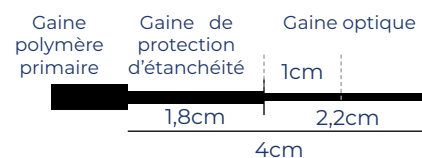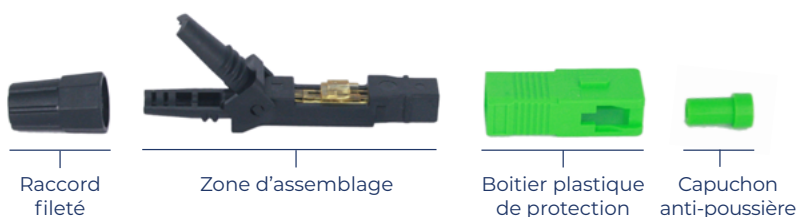

Dimensions de préparation du câble fibre optique pour épissure mécanique CM SA

DONNEES TECHNIQUES

Reference		CM SA
Code		363021
Connector		SC
Polishing		APC
Ferrule		Ceramic
Tensile strength	N	30
Fibre	µm	SM - 9/125
Accepted outer diameters	mm	3mm jacket 3x2mm flat cable 2mm. (Requires using supplied yellow adapter) 900 µm. (Requires using the supplied transparent adapter)
Insertion loss	dB	≤0,2
Return loss	dB	≥45
Lifespan connections		100