



# TWIN ENCODER / STREAMER

## EN 2HD-IP

- ✓ 2 HDMI inputs encoder / streamer.
- ✓ IP multicast / HLS / RTMP on-line content output for local or public network (internet)
- ✓ Supports H.264 encoding.
- ✓ Supports single stream output program.
- ✓ Adaptive gigabit network port output.
- ✓ Support operation interface: Web network management software
- ✓ Up to 25 simultaneous users



EN 2HD-IP

## TECHNICAL INFORMATION


REFERENCE	EN 2HD-IP	
Code		284001
INPUT		
Input connector		2 x HD
Input video resolution		1920*1080 60P, 1920*1080 50P, 1920*1080 60i, 1920*1080 50i, 1280*720 60P, 1280*720 50
OUTPUT		
Video encoding		H.264
Audio encoding		AAC
Encoding latency	ms	150-300
Media protocol		RTSP/RTMP/HTTP/HLS/UDP/RTP/SRT
Graphic Overlay		User-defined continuous text and image overlay
Output stream		IP SPTS
Output port		100/1000M RJ45 for NMS and DATA
GENERAL		
Consumption	W	5
Dimensions	mm	148 x 108 x 28
Net weight	Kg	0.5
Languages		English/ Spanish

- Technical specifications and design are subject to change without prior notice.

- The product complies with CE marking requirements. The declaration of conformity is available on the website [www.ek.plus](http://www.ek.plus)

## INSTALLATION EXAMPLES

### LOCAL NETWORK DISTRIBUTION

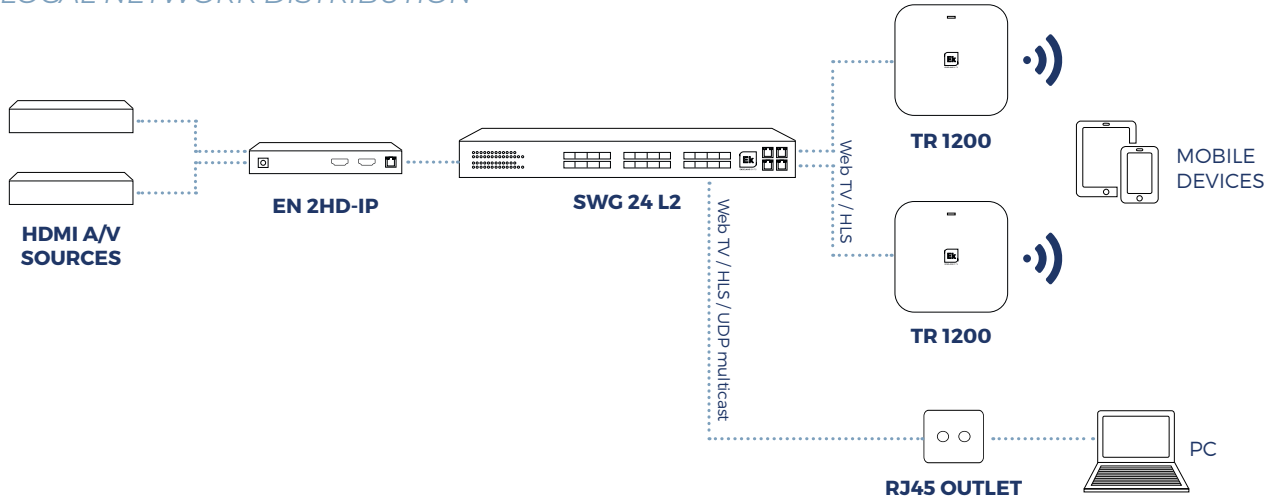

### PUBLIC INTERNET DISTRIBUTION

