



EKSELANS BY ITS

CENTRAL ALARM GSM GSM-1

Alarm management through mobile application Android / iPhone

Microphone and speaker

Internal siren 95 dB sound power

Modern design and discreet


Backup batteries (if electrical power failure)

Easy to install

Accepts up to 10 RC 1

Manage up to 50 different sensors

Reference	GSM-1
Code	260001
Power Supply	110 - 240V AC 50-60Hz
Power Supply Output	12V DC 500mA
GSM working frequency	850/900/1800/1900 Mhz
Standby Current	110mA
Alarm Current	340mA
Backup Battery	2pcs 3.7V 800mAh lithium battery(BL-5B)
Siren Volume	110dB
Supported Wireless Accessories	10 remote controls and 50 wireless sensors
Radio Frequency	433,92 MHz
Temperature	-10°C ~ +55°C
Relative Humidity	≤ 80% (non-condensing)
Dimensions (L x W x H)	188 x 132 x 26 mm

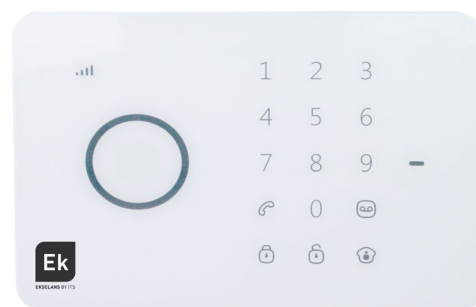

GSM-1