


## 3-HOLE FIBRE STRIPPING TOOL H PF

Reference		H PF
Code		364001
Large cut	mm	1,6 ... 3 to 0,6...0,9
Medium cut	µm	600...900 to 250
Small cut	µm	250 to 125

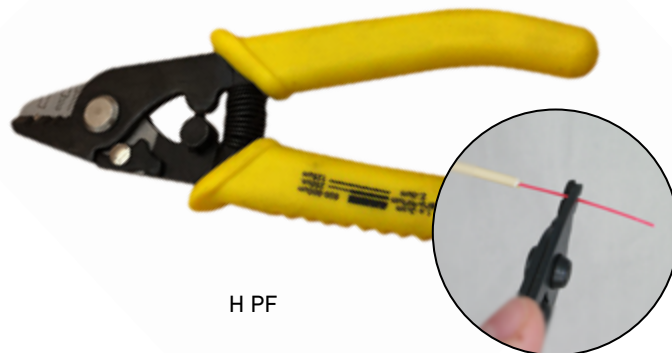

H PF

- Keep your tool clean
- Adjust the stop with the supplied allen key in order to avoid the complete closing of the scissors and cutting the fiber \*



1. Remove the jacket with the largest notch. Cut and slide
2. Cut the fiber with the fiber scissors, reference H TJ
3. Remove the 900 µm (adjusted fiber) coating. The 250µm buffer will be visible
4. Remove the 250 µm buffer to see the 125 µm cladding of the fiber. It is recommended to pass several times while increasing the desired distance.