

KIT CM COMPACT AV8



CONVERTS
8 DTT HD
SERVICES
TO SD


- ✓ Headend kit to convert 8 DVB-T/ DVB-T2 services - H264/H.265 in to COFDM SD MPEG 2
- ✓ 2 COFDM multiplex at the output
- ✓ Professional modulation quality
- ✓ Simple and intuitive programming
- ✓ It allows you to respect the existing channel list in the installation without having to reprogram the televisions; this may require the use of additional CM 4AV-TC modules



EKSELANS BY ITS



KIT CM COMPACT AV8

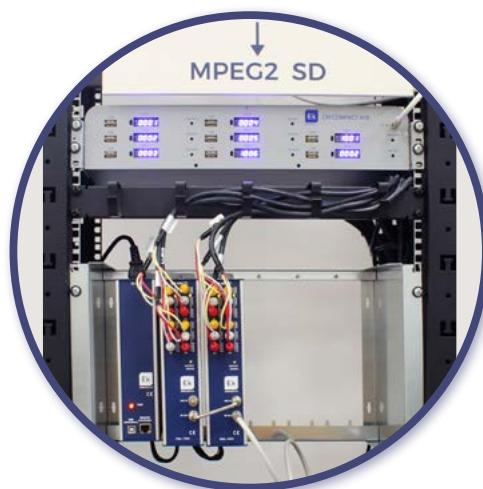

Example of CM COMPACT AV8 KIT
installed in a rack cabinet



TECHNICAL TABLE

REFERENCE	KIT CM COMPACT AV 8
Code	085005
INPUT	
Number of RF inputs	1
Number of tuners	8
Input frequency	47-862 MHz
Impedance	75 Ohm
Input level	-70 a -8dBm (39 a 101dBuV)
Dimensions for CM COMPACT AV8	19"x 2U x 232mm
OUTPUT	
Number of RF outputs	1
Output frequency	170 - 862 MHz
Maximum output level	95 dBuV
Modulation	COFDM selectable
Number of MUX	2 COFDM
MER	>35dB (COFDM)
GENERAL	
Programming	On-site with CM Management software
Power	AC100-240V. 50/60Hz
Modular power supply	FA524 IN: AC100-240V. 50/60Hz - OUT: 5Vdc

- Technical specifications and design are subject to change without prior notice.

- The product complies with CE marking requirements. The declaration of conformity is available on the website www.ek.plus