

Ek**EKSELANS BY ITS**

2-WIRE SINGLE-FAMILY VIDEO DOOR KITS



Kit with:

PE 1BM: Outdoor panel


MON 43V: 4.3" touch screen monitor

PFA 2420: power supply

- ✓ Single-Family Video Door Kit
- ✓ Installation with 2 non-polarized wires
- ✓ Outdoor panel with camera, push button, and Mifare access control
- ✓ Hands-free 4.3-inch color monitor with wall-mount support
- ✓ DIN rail installation power supply
- ✓ Expandable up to 4 monitors and 2 outdoor panels



PE 1BM
321013

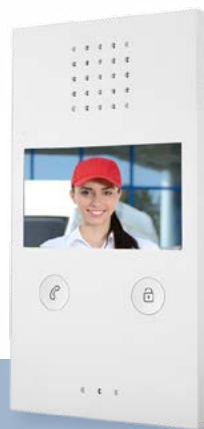

MON 43V
320003



PFA 2420
323002

TECHNICAL INFORMATION

| REFERENCE | KIT HOME | |
|-----------|----------|--|
| Code | 322003 | |

| REFERENCE | | PE 1BM |
|---------------------------|----|--------------------|
| Voice volume adjustment | | Yes |
| Monitoring time | s | 20 |
| Time speaks | s | 20 |
| Terminals | | BUS, BUS |
| Supply voltage | V | 24 |
| Consumption (Standby) | mA | 30 |
| Consumption (Work) | mA | 95 |
| Work temperature | °C | -10 ~ +40 |
| Working relative humidity | % | 10 ~ 90 |
| Dimensions | mm | 180 x 93 x 44 |
| Material | | Metallic (zamak) |

| REFERENCE | | MON 43V |
|---------------------------|-----------|-------------|
| Screen format | Ratio / " | 16:9 / 4,3 |
| Screen size | mm | 95 x 54 |
| Screen resolution | Pixels | 480 x 272 |
| Pixel size | mm | 0,10 x 0,37 |
| Tone volume adjustment | | Yes |
| Speaker volume adjustment | | Yes |
| Brightness adjustment | | Yes |
| Contrast adjustment | | Yes |
| Monitoring time | s | ~45 |
| Speaking time | s | ~45 |
| Terminals | | BUS, BUS |
| Voltage feeding | Vdc | 24 |
| Consumption (Standby) | mA | 20 |
| Consumption (Working) | mA | 150 |
| Working temperature | °C | -10 ~ +40 |
| Working humidity range | % | 10 ~ 90 |

| REFERENCE | | PFA 2420 |
|--------------------------------|----------|-----------------------------|
| Input voltage | Vac / Hz | 100-240 / 50-60 |
| Output voltage | Vdc | 24 |
| Maximum output current | A | 2 |
| Maximum power | W | 48 |
| Primary electrical terminals | | L, N, GND |
| Secondary electrical terminals | | 4 x BUS |
| Fixing | | DIN Rail (7 modules) / Wall |
| Working temperature | °C | -10/+40 |
| Working humidity range | % | 10 / 90 |