

2-WIRE SINGLE-FAMILY VIDEO DOOR KITS



Kit with:

PE 1BM: Outdoor panel


MON 43V: 4,3" monitor

PFA 2420: power supply

- ✓ Single-Family Video Door Kit
- ✓ Installation with 2 non-polarized wires
- ✓ Outdoor panel with camera, push button, and Mifare access control
- ✓ Hands-free 4.3-inch color monitor with wall-mount support
- ✓ DIN rail installation power supply
- ✓ Expandable up to 4 monitors and 2 outdoor panels



PE 1BM
321013

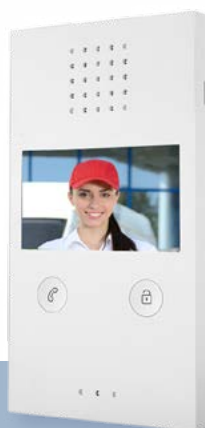

MON 43V
320003



PFA 2420
323002

TECHNICAL INFORMATION

REFERENCE	KIT HOME
Code	322003

REFERENCE		PE 1BM
Voice volume adjustment		Yes
Monitoring time	s	20
Time speaks	s	20
Terminals		BUS, BUS
Supply voltage	V	24
Consumption (Standby)	mA	30
Consumption (Work)	mA	95
Work temperature	°C	-10 ~ +40

REFERENCE		MON 43V
Screen format	Ratio / "	16:9 / 4,3
Screen size	mm	95 x 54
Screen resolution	Pixels	480 x 272
Pixel size	mm	0,10 x 0,37
Tone volume adjustment		Yes
Speaker volume adjustment		Yes
Brightness adjustment		Yes
Contrast adjustment		Yes
Monitoring time	s	~45
Speaking time	s	~45
Terminals		BUS, BUS
Voltage feeding	Vdc	24
Consumption (Standby)	mA	20
Consumption (Working)	mA	150

REFERENCE		PFA 2420
Input voltage	Vac / Hz	100-240 / 50-60
Output voltage	Vdc	24
Maximum output current	A	2
Maximum power	W	48
Primary electrical terminals		L, N, GND
Secondary electrical terminals		4 x BUS
Fixing		DIN Rail (7 modules) / Wall
Working temperature	°C	-10 / +40
Working humidity range	% Hum	10 / 90