




EKSELANS BY ITS

AMPLIFICADORES SAT CON MEZCLA TER **MAD 382 L**
 AMPLIFICATEURS SAT AVEC COUPLAGE TER **MAD 382 L**
 AMPLIFICATORI SAT CON MISCELAZIONE TER **MAD 382 L**
 AMPLIFICADORES SAT CON MISTURA TV **MAD 382 L**
 SAT AMPLIFIERS WITH TV MIXER **MAD 382 L**



REFERENCIA	RÉFÉRENCE	ARTICOLO	REFERÊNCIA	REFERENCE	MAD 382 L	
Código	Code	Codice	Código	Code	170005	
Entradas	Entrées	Ingressi	Entradas	Inputs	VHF+UHF	SAT
Frecuencias	Bande passante	Frequenze	Frequências	Frequency Range	MHz	47-790 950-2150
Ganancia	Gain	Guadagno	Ganho	Gain	dB	-1 31-38
Regulación	Réglage	Regolazione	Regulação	Regulation	dB	- 15
Ecuilizador	Égaliseur	Equalizzatore	Equalizador	Tilt	dB	- 7
Nivel de salida DIN 45004B	Niveau de sortie DIN 45004B	Livello d'uscita DIN 45004B	Nível de saída DIN 45004B	Ouput level DIN 45004B	dBµV	- 120
Pérdidas de retorno	Affaiblissement de réflexion	Perdite di ritorno	Perdas de retorno	Return loss	dB	- >6
Figura de ruido	Facteur de bruit	Figura di rumore	Figura de ruído	Noise figure	dB	- 7
Alimentación	Secteur	Alimentazione	Alimentação	Mains voltage	Vac	230 +/-10%
Tensión salida SAT	Voltage sortie SAT	Tensione uscita SAT	Voltagem saída SAT	SAT output voltage	V	- 13
Consumo	Consommation	Consumo	Consumo	Consumption	W	2,5

1.



-Fijar el amplificador a la pared utilizando los tacos y tornillos suministrados y realizar las conexiones

-Fixer le boîtier au mur. Se servir de la cheville et la vis fournies. Faire les connexions

-Fissare l'amplificatore al muro con i tasselli e le viti fornite in dotazione. Effettuare i collegamenti

-Fixar o amplificador para a parede usando as buchas e parafusos fornecidos. Fazer as conexões

-Fix the amplifier to the wall using the plugs and screws supplied. Make connections

2.



-Conectar el amplificador a la corriente. El led deberá encenderse

-Raccorder l'amplificateur au courant électrique. La led doit s'allumer

-Collegare l'amplificatore alla corrente. Il led si dovrà illuminare

-Ligue o amplificador para o fornecimento de energia. O LED deve acender

-Connect the amplifier to the mains. The LED should light on

3.




-Conectar a la salida de la central un medidor de nivel y regular la ganancia necesaria

-Brancher à la sortie de la centrale un mesureur de niveau et régler le gain nécessaire

-Collegare all'uscita dell'amplificatore, un misuratore di segnale e regolare il guadagno

-Conecte-se à saída do amplificador um medidor de nível e ajuste o ganho necessário

-Connect a signal meter to the output and adjust the necessary gain

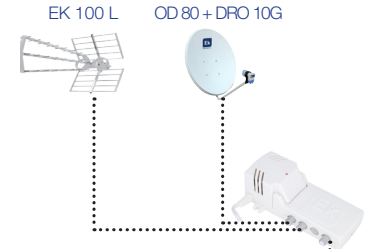

DVB-S/S2 STB