

2 WIRES VIDEO DOOR ENTRY SYSTEM WITH MIFARE RFID ACCESS CONTROL

PCD-E

- ✓ Non-polarized 2 wires system
- ✓ Digital outdoor panel in stainless steel with high quality color camera
- ✓ Auto-adjusting light sensor
- ✓ Compatible with outdoor door lock
- ✓ LCD display with simple and intuitive directory
- ✓ Audio call volume adjustment on monitor
- ✓ Up to 4 outdoor panels and up to 32 users (64 indoor units max)
- ✓ Monitoring function. Possible to watch the street without prior call.
- ✓ Easy to install and to program
- ✓ Integrated MIFARE access control
- ✓ Paralell or series installation option
- ✓ It can be used as replacement using existing cabling
- ✓ SD card slot
- ✓ Additional CCTV cameras option

Ek


EKSELANS BY ITS




SURFACE MOUNTING



FLUSH MOUNTING

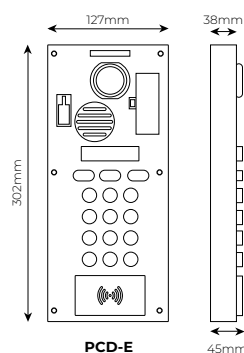

PCD-E



Stainless steel PCD-E



TECHNICAL INFORMATION

REFERENCE		PCD-E
Code		321008
Camera angle adjustment	°	Fijo
Minimum Illumination	Lux	<1
Resolution	px	122x32
Buttons	Nº	Numeric keypad
RFID reader	Nº	1
Llaves de configuración incluidas	Nº	1
Voltage	V	24
Consumption (Standby)	W	<1
Consumption (Working)	W	3,6
Dimensions (PCD-E module without front panel)	mm	302 x 127 x 38
Dimensions (PCD-E module with front panel)	mm	325 x 155 x 42
Working temperature	°C	-10 / +55
Working humidity range	% Hum	10 / 90