

DIGITAL TERRESTRIAL TELEVISION DVB-T/T2 H265 HD RECEIVER

RCT-2

DVB T2
10 BIT

HEVC
High Efficiency Video Coding

HD

FTA

PLAY

UNIVERSAL
RCU

TIMESHIFT


- ✓ Fully compatible with DVB-T/T2
- ✓ Quick and easy updating thanks to the USB port
- ✓ Auto/NTSC/PAL Support
- ✓ HDMI 1080p output
- ✓ HEVC H265 Support (max. 10 bit), H264, MP3, MKV, MP4, JPEG, AVI etc.
- ✓ USB 2.0, Multimedia player for AVI, MKV, MP3, MP4, H.264, JPEG etc.
- ✓ Multilingual OSO
- ✓ Local language MENU
- ✓ HEVC (max. 10 bit), principal profile @ level 4.1, 10 principal profiles @level 4.1,
- ✓ 576i/p, 720p, 1080i, 1080p Resolution
- ✓ Output. AUTO, PAL, NTSC
- ✓ Automatic or manual search
- ✓ Subtitles and teletext supports
- ✓ FAT16/32 Format and NTFS system files
- ✓ Front display with time and brightness adjustment
- ✓ SCART, HDMI
- ✓ 4:3PS, 4:3LB, 16:9



EKSELANS BY ITS



RCT-2

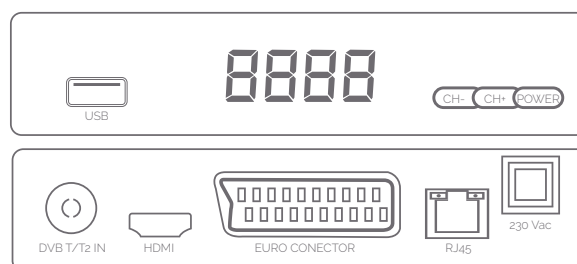

BACK PANEL VIEW



PACKAGING

TECHINICAL TABLE

REFERENCE	RCT-2
Code	180009
Main system	
CPU Speed	600 MHz
Flash Memory	32M bit
DDR3	512M bit
Tuner & Demodulator	
ANT. Connector	IEC TYPE, female
Loop Output	IEC TYPE, male
Input Frange range	50.5--858MHz
Input Impedance	75 Ω
Input Signal level	-82 dBm to -20 dBm (average power)
Audio/video data in/out	
AV output:	Scart
HDMI	HDMI output
Operation Environment	
Operation temperature	+0°70°
Storage temperature	-40°+65°
Mpeg Audio/ Video Decoding	
Video	MPEG-2 (ISO/IEC 13818-2) MPEG-4 (ISO/IEC14496-2) H.264 (ISO/IEC14496-10) H.265 HEVC (Max 10bit)
Profile Level	MPEG-2 MP@HL MPEG-4 ASP@L5 HD H.264HP@L4.1 * HEVC (max 10 bit) main profile @level 4.1,main 10 profile @level 4.1
Input rate	Max. 60M bits
Aspect ratio	4:3, 16:9, Auto
Video Resolution	1920*1080i; 1280*720p; 720*576i
Audio decoding	MPEG-1 Layer I/II, MPEG-2 layer I/II, AAC, AAC+/HE-AAC/AC3,Dolby plus
Audio mode	Mono/Left/Right/Stereo
Sample rate	32, 44.1 & 48 KHz
Power supply	
Input voltage	AC100--240V, 50/60Hz Or 12V/1A
Type	AC/ DC Power