


SW16 M - 334104



**16-port 10/100/1000 Ethernet switch.**

## DESCRIPTION

16-port 10/100/1000 Ethernet switch.

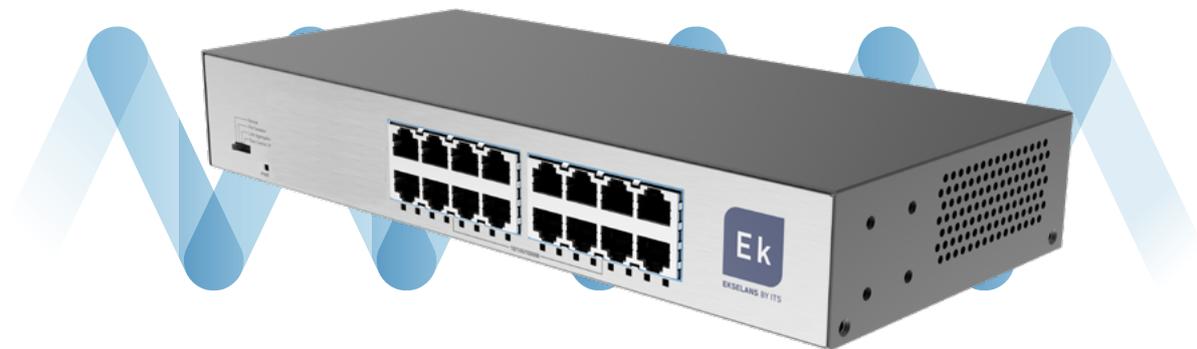

## STRENGTHS

- 16 high-speed 10/100/1000 Mbps ports
- Compact size
- Plug-and-play, no setup required.
- Green technology: energy saving. Smart power management
- With a 19-inch rack-mounting kit



Updated on: 20/03/2026

This document is confidential and the property of ADALTRA. ADALTRA holds the copyright, and the document may not be copied or modified in any way, in whole or in part, without the written permission of ADALTRA. The specifications contained in this document are not binding and are subject to change without notice.

## FEATURES

REFERENCE	SW16 M
Code	334104
Ethernet interface	16 x 10/100/1000 Mbps Ethernet ports
Switching capacity	32 Gbps
Transmission method	Storage and Shipping
Port functions	IEEE 802.3 for Ethernet IEEE 802.3u for Fast Ethernet IEEE 802.3x, 802.3ab, 802.3az Auto MDI/MDIX Supports half/full-duplex operation (half-duplex at 10/100 Mbps, full-duplex at 1000 Mbps)
Switching capacity	32 Gbps
Maximum forwarding rate	35.7 Mpps
MAC Address Table	8K
LED indicators	Event: 1000m, 1000m - Food
Food	100-240 V AC, 50-60 Hz
Consumption	15 W (max)
Operating temperature	Operating temperature: 0-50 ° °C Storage temperature: -20-70 °C
Humidity	Operating: 10-90% (non-condensing) Storage: 5-90% (non-condensing)
Max. heat dissipation	51.70 BTU/h
Housing material	Metal
Dimensions	280 x 180 x 44 mm
Weight	1,6 g