



EKSELANS BY ITS

# SWITCHES PoE

SWP 5 · SWP 9 · SWP 26



- ✓ 4 / 8 / 24 Alta velocità ethernet porte 10 / 100 / 1000 Mbps
- ✓ 2 - 4 porte uplink (Ethernet e SFP fibra 1GB)
- ✓ PoE porte 48 Vdc
- ✓ Potenza totale 96W / 120W / 450W



SWP 5




SWP 9



SWP 26

## Schema di installazione:

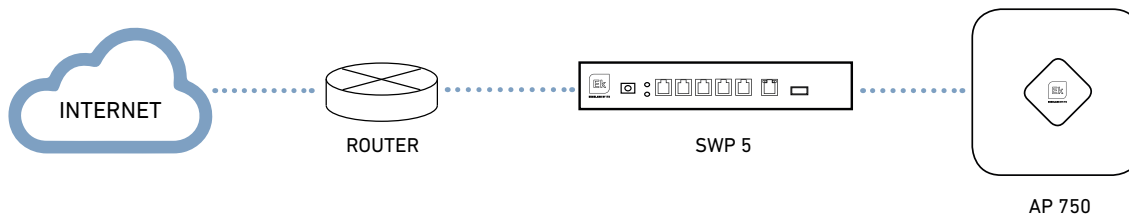

## TABELLA TECNICA

| ARTICOLO              |      | SWP 5   | SWP 9  | SWP 26   |
|-----------------------|------|---|--|--|
| Codice                |      | 334001  | 334002   | 334003   |
| Alimentazione PoE     | W    | 96  | 120  | 450  |
| Standard PoE          |      | IEEE 802.3, 802.3u, 802.3x, 802.3af, 802.3at  |  |  |
| Interfaccia Ethernet  |      | 4 x 10 / 100 / 1000 Mbps puertos Ethernet<br>1 x 10 / 100 / 1000 Mbps puerto Ethernet Uplink<br>1 x 1000 puerto SFP Fibra | 8 x 10 / 100 / 1000 Mbps puertos Ethernet<br>2 x 10 / 100 / 1000 Mbps puerto Ethernet Uplink | 24 x 10 / 100 / 1000 Mbps puertos Ethernet<br>2 x 10 / 100 / 1000 Mbps puerto Ethernet Uplink<br>2 x 1000 puerto SFP Fibra |
| Back bandwidth        | Gbps | 12  | 20   | 12.8   |
| Tabella indirizzi MAC |      | 2000  |  | 8000   |
| Alimentazione         | Vdc  | 48  |  |  |
| Temperatura di lavoro | °C   | 0 / 55  |  |  |
| Dimensioni            | mm   | 185 x 96 x 24   | 250 x 122 x 35   | 440 x 284 x 44   |
| Assorbimento          | W    | Max. 96   | Max. 120   | Max. 450   |