


POWER MANAGEMENT

UPS 16 / UPS 32 / UPS 48

- Uninterruptible Power Supply
- Effective management of the battery charging process
- Stackable with other units for greater autonomy
- Protected against overvoltages and short circuits
- Switch for battery disconnection
- Do not forget to connect the batteries

REFERENCE		UPS 16	UPS 32	UPS 48
Code		312001	312002	312003
Maximum input voltage	V	13		
Minimum input voltage	V	9		
Rated output voltage	V	12 ± 5%		
Maximim output current	mA	1000		
Batteries	mAh	2x 2200 (LiPo)	4x 2200 (LiPo)	6x 2200 (LiPo)
Capacity	Wh	16	32	48
Working temperature	°C	10 ÷ 40		
Storage temperature	°C	-5 ÷ 50		
Maximum humidity	% Hum	<90		
Dimensions	cm	23 x 15 x 3		

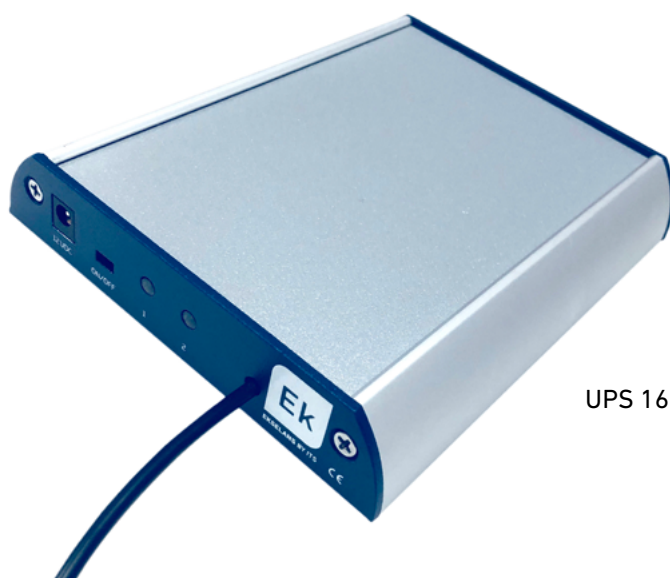

UPS 16 / UPS 32 / UPS 48