


LTE FILTERS

FE 782 E · FI 782

Lte2

- ✓ Low passband insertion loss
- ✓ High LTE band rejection
- ✓ Reversible input / output

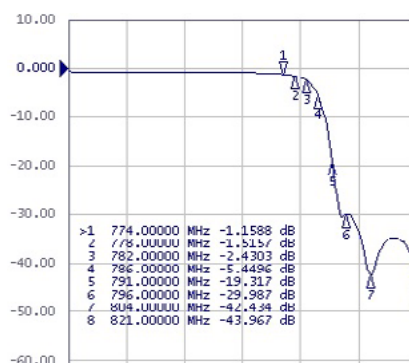

Ek

EKSELANS BY ITS



FE 782 E



FI 782

TECHNICAL TABLE

REFERENCE		FE 782E	FI 782
Code		031006	031007
Passband	MHz	5 - 782	5 - 782
Insertion loss	dB 5-760 MHz	<1	<1
	dB 778 MHz	<1,6	<1,6
	dB 782 MHz	<2,7	<2,7
	dB 786 MHz	<5	<5
	dB 790 MHz	>17	>17
Rejected band	MHz	783-862	783-862
Rejection	dB 791 MHz	>19	>19
	dB 796 MHz	>28	>28
	dB 804 MHz	>40	>40
Current passage	mA	300 mA	300 mA