

SAT AMPLIFIERS WITH TV MIXER

MAD 382 L2

Ltè2


- ✓ For IF (SAT) amplification in medium and big collectif installations
- ✓ Remote supply to LNB
- ✓ High output level
- ✓ High gain
- ✓ Terrestrial signal mix
- ✓ Operation LED indicator
- ✓ A Class

Ek

EKSELANS BY ITS



MAD 382 L2

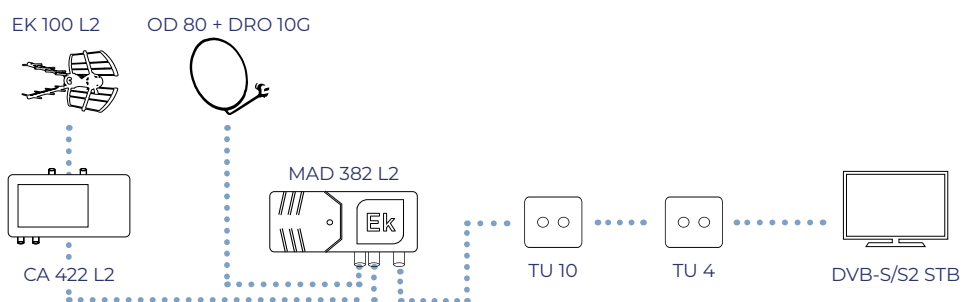



TECHNICAL TABLE

REFERENCE		MAD 382 L2	
Code		170006	
Input		VHF+UHF	SAT
Frecuence	MHz	47-694	950-2200
Gain	dB	-1	31-38
Regulation	dB	-	15
Equalizer	dB	-	7
Output level DIN 45004B	dBµV	-	120
Return losses	dB	-	>6
Noise figure	dB	-	7
Power supply	Vac	230 +/-10%	
SAT voltage	V	-	13
Power consumption	W	2,5	