



EKSELANS BY ITS

SE-2

Wireless Outdoor Siren

User manual



Features


The wireless outdoor siren is an accessory of smart alarm system. It will sound with the strobe light flashing to stop crime when working.

It's easy to setup, reliable and safe, with core microprocessor and anti-tamper function.

Parameters

Reference	SE-2
Code	261034
Wortking voltage	DC 12V
Battery	Ni-MH de 7,2V 600mAh
Working current	< 300mA
Standby current	< 20 ~ 50mA
Battery Standby Time	< 20h
Maximum Siren Volume	120dB / 3m
Transmission distance	Without obstacle 200m
Transmission frequency	433,92MHz
Working Temperature	-10°C ~ 40°C
Humidity	< 90% (non-condensing)
Dimension	263,0x195,0x61,0mm
Weight	551,2 gr (battery included)

Appearance

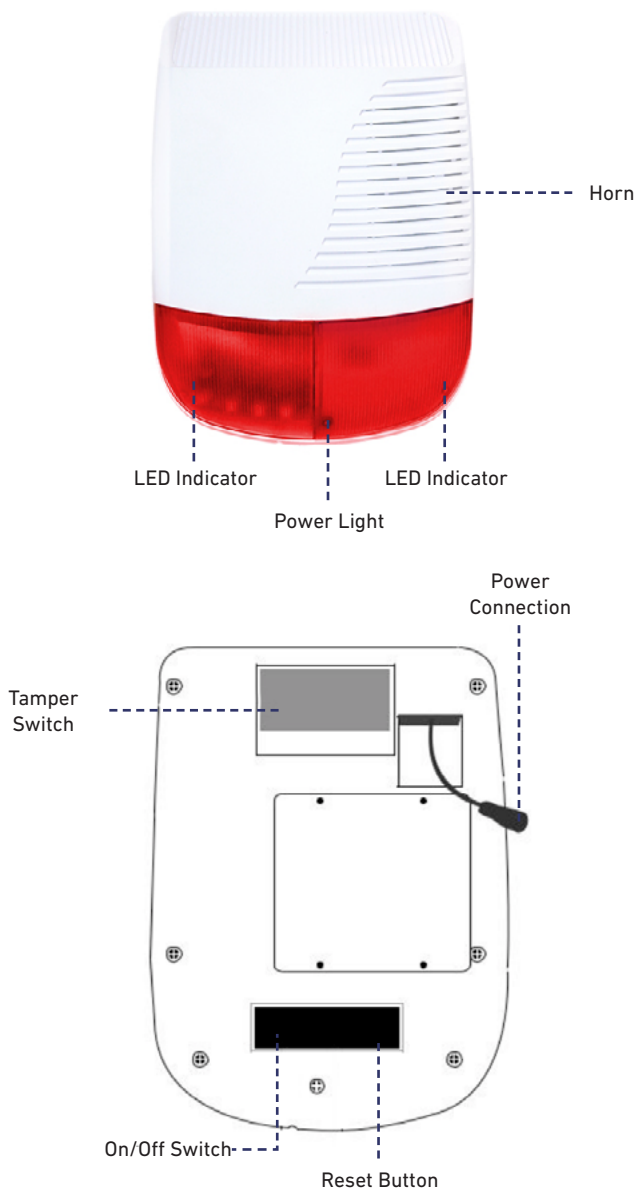

Pairing with main panel

Scanning the QR Code for Pairing.

- Turn on both the siren and the alarm system, reset the siren by pressing the reset button on the back
- until it beeps. Scan the QR code printed on this accessory.
- The pairing result would be confirmed in App and also be indicated by 2 beeps from siren.

Learn Mode

- Launch the App/PC client for turn on Learn Mode.
- Follow the guideline in App/PC client to trigger the accessory for the system to learn.
- The pairing result would be confirmed in App/PC client and also be indicated by 2 beeps from siren.

Hint: How to trigger?

- Power up the siren.
- Press the reset button on the back until it beeps.

Function Clarification

1. Set Up Sound & Light Mode for Status Indicating all settings can be operated in App after pairing.

Users can determine to beeps or be silent when system alarm mode (ARM/DISARM/HOME ARM) changes.

Users can also set up the LED indicator to stay lighting, keep blinking, or just a flash when system alarm mode

changes. Other settings like siren time, indicating volume and alarm volume can be set up in App too.

In default, the Sound and Light modes are listed below:

Main panel status	LED Indicator Status	Horn Status	Interval Time of Sound	Sound Frequency
Disarm	Power light on	Beep 3 times	150 m	1 kHz
Arm	Red light flashing	Beep 2 times	150 m	1 kHz
Home arm	Blue light flashing	-	-	-
SOS	Red/Blue light flashing alternately	SOS sound	-	-

2. Anti-tamper function

The siren will immediately alarm when someone tries to remove illegally.

Accessories

- Power supply: 1x 5.5mm DC Output: 12V=1A
- 4 × screws;
- 4 × plastic screw bolt.



EKSELANS BY ITS

EKSELANS by ITS

ITS Partner O.B.S. S.L

Av. Corts Catalanes 9-11

08173 Sant Cugat del Vallès

Barcelona (Spain)

Tel: +34 935839543

info@ek.plus

www.ek.plus