


PROGRAMMABLE AMPLIFIERS

AP 10 / AP 10 ICT

- 10 programmable UHF filters
- Up to 7 channels per filter (56 MHz)
- Automatic gain control, equalizer and automatic output level adjustment
- LTE filtering
- Remote powering voltage for pre-amplifiers
- High efficiency external power supply
- Built-in programmer
- Data transfer between devices through CRD

REFERENCE	AP 10 ICT						
Code	071003						
Inputs		BI/FM	BIII/DAB	UHF 1	UHF2	UHF 3	SAT
Frequency Range	MHz	47-108	174-230	470-862	470-862	470-862	950 - 2150
UHF filters configuration				3	5	2	
				1	7	2	
				-	8	2	
				3	-	7	
				1	-	9	
Gain	dB	30	45	51/31*			40
Regulation	dB	20	20	20			20
Equalizer	dB	-	-	-			0-9
Maximum input level	dB	90	80	75/95			80
Output level DIN 45004B	dBμV	120	120	118			119
Return loss	dB	>10	>10	>10			>6
Noise figure	dB	9	4	7			6
DC Pass	Vcc	-	-	0/12/24 - 80 mA			0/13/17 300 mA
Selectivity (+ / -16 MHz)	dB	-	-	>16			-
Mains voltage	Vac	230 +/-10%					
Current consumption	W	26W					

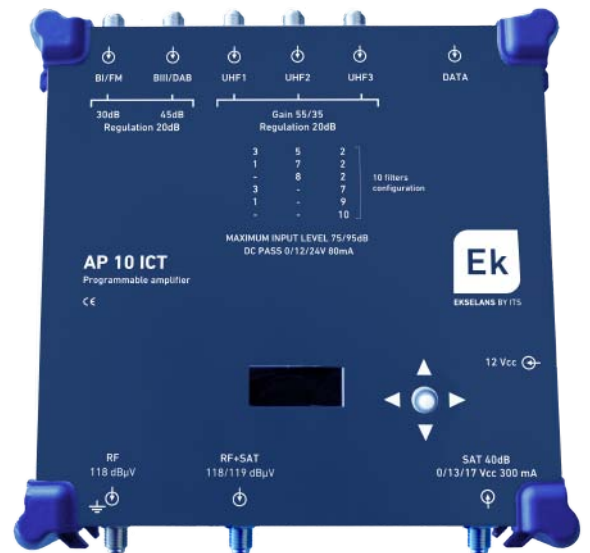

INCLUDED



OPTIONAL

*Switchable